

DUROFIX™

Manufacturers of Precision & Power





Quality • Durability • Reliability • Value

With more than 30 years on power tool development, Durofix has become one of the leading portable power tool manufacturers in the world. Our product range covers construction, woodworking, automotive and industrial tools for professionals and high-end hobby users. Supported by our electronics division of the Mobiletron Group, we own and apply advanced Lithium-ion battery management, electronic control and brushless motor technologies to fabricate state-of-the-art portable power tools. We commit to developing innovative and reliable products and providing excellent worldwide services in the Americas, Europe and Asia-Pacific.

**EXTREME
60v
POWER**



CONTROL+ MOTOR INTEGRATED DESIGN

Energy Saving, Higher Efficiency & Longer Life-span

NO CARBON BRUSH WORN OUT

No Sparking & Heat Generating

ELECTRONIC TORQUE CONTROL (ETC)

Torque Output Control Much More Precisely



60v


- ★ **HIGHER VOLTAGES,
LESS CURRENT DRAW**
- ★ **BETTER EFFICIENCY,
LOWER LOSSES BY HEAT**
- ★ **FIRST TO THE MARKET**

RI60164

Li-ion 60V BRUSHLESS Jumbo Impact Wrench

- Electronic torque & speed control
- Longer running time & life cycle
- 2,050 Nm max. reverse torque
- Durable metal gearbox housing
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status

Model Number	RI60164
Voltage	60 Vdc
Drive	1/2" Square
Max. Reverse Torque	2,050 Nm (1,500 ft-lbs)
Max. Tightening Torque	450 / 600 / 1,350 Nm (332 / 450 / 1,000 ft-lbs)
No Load Speed	0-900 / 0-1,200 / 0-1,600 RPM
Impacts per Minute	0-2,400 IPM
Tool Weight	3.83 kg (8.42 lbs)



powered by **LI-ION TECH**

60V CHARGERS & BATTERY PACK



DC60UN26-C25



B6029LA
B6029LB




B6035LE

RI60164-6

Li-ion 60V BRUSHLESS 3/4" Jumbo Impact Wrench

- Electronic torque & speed control
- Longer running time & life cycle
- 2,175 Nm max. reverse torque
- Durable metal gearbox housing
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status

Model Number	RI60164-6
Voltage	60 Vdc
Drive	3/4" Square
Max. Reverse Torque	2,175 Nm (1,605 ft-lbs)
Max. Tightening Torque	450 / 600 / 1,450 Nm (332 / 450 / 1,070 ft-lbs)
No Load Speed	0-900 / 0-1,200 / 0-1,600 RPM
Impacts per Minute	0-2,400 IPM
Tool Weight	3.83 kg (8.42 lbs)




RI60158

Li-ion 60V BRUSHLESS Jumbo Impact Wrench

- Electronic torque & speed control
- Longer running time & life cycle
- 1,500 Nm max. reverse torque
- Durable metal gearbox housing
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status

Model Number	RI60158
Voltage	60 Vdc
Drive	1/2" Square
Max. Reverse Torque	1,500 Nm (1,100 ft-lbs)
Max. Tightening Torque	250 / 500 / 1,000 Nm (185 / 370 / 740 ft-lbs)
No Load Speed	0-1,100 / 0-1,500 / 0-1,600 RPM
Impacts per Minute	0-2,400 IPM
Tool Weight	3.53 kg (7.77 lbs)




RI60158-6

Li-ion 60V BRUSHLESS 3/4" Jumbo Impact Wrench

- Electronic torque & speed control
- Longer running time & life cycle
- 1,500 Nm max. reverse torque
- Durable metal gearbox housing
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status

Model Number	RI60158-6
Voltage	60 Vdc
Drive	3/4" Square
Max. Reverse Torque	1,500 Nm (1,100 ft-lbs)
Max. Tightening Torque	250 / 500 / 1,000 Nm (185 / 370 / 740 ft-lbs)
No Load Speed	0-1,100 / 0-1,500 / 0-1,600 RPM
Impacts per Minute	0-2,400 IPM
Tool Weight	3.53 kg (7.77 lbs)



1" JUMBO IMPACT WRENCH

- ◆ Two 60V (2.5Ah / 150Wh) Batteries for either 250+ 1-1/4" Bolts or 150+ Lug Nuts
- ◆ Removable & 360° Adjustable Side Handle
- ◆ Dual Battery System for Double Capacity & Runtime
- ◆ Pneumatic Replacement-Free from Compressor & Hoses
- ◆ Auto Shut off for 4 Different Torque Settings




RI60176E



RI60176



Model Number	RI60176E	RI60176
Voltage	60 Vdc	
Drive	1" Square	
Max. Reverse Torque	4,067 Nm (3,000 ft-lbs)	
Max. Tightening Torque	3,000 Nm (2,212 ft-lbs)	
Torque Setting Range	340 / 680 / 1,080 / 1,690 Nm (250 / 500 / 800 / 1,250 ft-lbs)	
No Load Speed	0-1,200 RPM	
Impacts per Minute	0-1,450 IPM	
Tool Weight	12.72 kg (27.98 lbs)	12.00 kg (26.40 lbs)

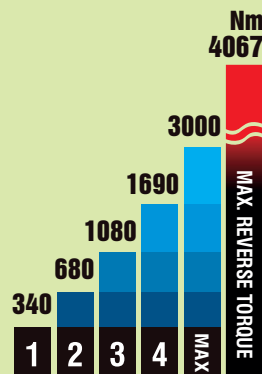

60v

RAILWAY IMPACT WRENCH

- ◆ Dual Battery System for Double Capacity & Runtime
- ◆ Extended Handle Design – Operation without Bending over
- ◆ 36 Torque Settings for Auto Shut off
- ◆ Two Side LEDs for Workplace Visibility



**36 TORQUE
SETTINGS**
Auto Shut Off

Model Number	RI60180A2-6
Voltage	60 Vdc
Drive	3/4" Square
Max. Reverse Torque	2,175 Nm (1,605 ft-lbs)
Max. Tightening Torque	1,450 Nm (1,070 ft-lbs)
Auto Shut Off (36 Setting)	150/160/170...500 Nm (Numerical indication)
No Load Speed	0-1,600 RPM
Impacts per Minute	0-2,000 IPM
Tool Weight	7.85 kg (17.27 lbs)





RI60166A1

Li-ion 60V BRUSHLESS Impact Wrench

- Electronic torque & speed control
- Longer running time & life cycle
- 3 fastening modes for different applications
- Durable metal gearbox housing
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status

Model Number	RI60166A1
Voltage	60 Vdc
Drive	1/2" Square
Max. Reverse Torque	800 Nm (590 ft-lbs)
Max. Tightening Torque	100 / 300 / 500 Nm (73 / 221 / 370 ft-lbs)
No Load Speed	0-1,500 / 0-1,800 / 0-2,500 RPM
Impacts per Minute	0-3,000 IPM
Tool Weight	2.04 kg (4.48 lbs)



RI60165A1

Li-ion 60V BRUSHLESS Impact Driver

- Electronic torque & speed control
- Longer running time & life cycle
- 3 fastening modes for different applications
- Durable metal gearbox housing
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status

Model Number	RI60165A1
Voltage	60 Vdc
Drive	1/4 Hex Shank
Max. Tightening Torque	100 / 180 / 270 Nm (73 / 133 / 200 ft-lbs)
No Load Speed	0-1,200 / 0-1,900 / 0-3,000 RPM
Impacts per Minute	0-3,000 IPM
Tool Weight	2.04 kg (4.48 lbs)

RK60132

Li-ion 60V BRUSHLESS 13 mm 2-Speed Jumbo Hammer Drill / Driver

- Longer running time & life cycle
- 21 torque settings + drill mode + hammer drill mode
- All metal gearbox housing
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status

Model Number	RK60132
Voltage	60 Vdc
Chuck Capacity	1/2" (13 mm)
Max. Torque	120 Nm (1,062 in-lbs)
No Load Speed	0-550 / 0-2,000 RPM
Blows per Minute	30,000 BPM
Tool Weight	2.56 kg (5.63 lbs)



RY6003

Li-ion 60V BRUSHLESS Rotary Hammer Drill

- 3-Mode Selector Switch
- Chisel Positioning
- Side Handle For reduces user's fatigue
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status

Model Number	RY6003	
Voltage	60 Vdc	
Chuck	SDS Plus	
Impact Energy	5.5 J	
No Load Speed	0-720 RPM	
Blows per Minute	0-3,700 BPM	
Drill Capacity	Concrete	32 mm (1-1/4")
	Steel	13 mm (1/2")
	Wood	30 mm (1-18")
Tool Weight	5.48 kg (12.08 lbs)	



When the tool body suddenly rotates rapidly due to locking of the drill bit or other reasons, the motor will be forced to stop to reduce the burden on the wrist.



RI60164-6E / RI60164E

Li-ion 60V BRUSHLESS JUMBO IMPACT WRENCH

- Extended anvil for better reaching recessed fasteners
- Electronic torque & speed control
- Longer running time & life cycle
- 2,175 Nm max. reverse torque (RI60164-6E)
- Durable metal gearbox housing
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status



RI60164E



RI60164-6E

Model Number	RI60164E	RI60164-6E
Voltage	60 Vdc	
Drive	1/2" Square	3/4" Square
Max. Reverse Torque	2,050 Nm (1,500 ft-lbs)	2,175 Nm (1,605 ft-lbs)
No Load Speed	0-900 / 0-1,200 / 0-1,600 RPM	

Model Number	RI60164E	RI60164-6E
Max. Tightening Torque	450 / 600 / 1,350 Nm (332 / 450 / 1,000 ft-lbs)	450 / 600 / 1,450 Nm (332 / 450 / 1,070 ft-lbs)
Impacts per Minute	0-2,400 IPM	
Tool Weight	3.94 kg (8.66 lbs)	4.14 kg (9.10 lbs)

RS6020

Li-ion 60V BRUSHLESS 7" Angle Polisher

- Longer running time & life cycle
- High performance and advanced ergonomics
- Dust Cover design increasing performance & extending tool life
- **IP56**: Superior dust and water resistance
- One/off trigger and lock on • Durable metal gearbox housing
- Variable speed dial • Battery indicator
- Spindle lock button design
- Two position side handle and bail handle

Model Number	RS6020
Voltage	60 Vdc
Pad Size	7" (180mm)
Spindle	5/8"/M14
Speed setting (No load) RPM	800 / 1,000 / 1,200 / 1,400 1,600 / 1,800 / 2,000 / 2,200
Speed control	8 settings
Tool Weight	3.15 kg (6.93 lbs)



RG6019

Li-ion 60V BRUSHLESS Angle Grinder

- Longer running time & life cycle
- Lock-on slide switch provides user comfort in extended use application
- Spindle lock button design for easy grinding disc change
- Three-position side handle provides user comfort and reduces user's fatigue
- Needle bearing construction for extra durability and longer tool life
- Durable metal gearbox housing
- Battery indicator shows battery status

Model Number	RG6019-115	RG6019-125
Voltage	60 Vdc	
Disk Size	4.5" (115 mm)	5" (125 mm)
Spindle Thread	M14 / 5/8"	
No Load Speed	9000 RPM	
Tool Weight	2.80 kg (6.16 lbs)	2.80 kg (6.16 lbs)

RG6020

Li-ion 60V BRUSHLESS Angle Grinder

- Longer running time & life cycle
- **Corded performance** : 15A corded power
- **Dual action trigger** : eliminating accidental trigger actuation
- **Tool-free** for all accessories changing & patent pending guard adjustment
- **IP56**: Superior dust and water resistance
- High performance and advanced ergonomics
- Durable metal gearbox housing
- Spindle lock button design • Battery indicator
- Three position side handle

Model Number	RG6020-150	RG6020-180	RG6020-230
Voltage	60 Vdc		
Disk Size	6" (150 mm)	7" (180 mm)	9" (230 mm)
Spindle Thread	M14 / 5/8"		
No Load Speed	4000 / 6000 / 9000 RPM	4000 / 6000 / 8000 RPM	6,600 RPM
Tool Weight	3.67 kg (8.07 lbs)	4.74 kg (10.43 lbs)	5.17 kg (11.38 lbs)



RI60182

Li-ion 60V BRUSHLESS HIGH TORQUE RAILWAY IMPACT WRENCH

- Powerful Impact Mechanism provides 4,725 Nm Max. Reverse Torque
- Dual Battery System for double runtime
- No more bending over with Extended Handle Design
- Pro-Grade Durable Metal Gearbox Housing
- Two Side LEDs for workplace visibility

7 TORQUE SETTINGS
Auto Shut Off



Model Number	RI60182	Torque Setting Range	250-3,000 Nm (185-2,220 ft-lbs)
Voltage	60 Vdc	No Load Speed	0-900 RPM
Drive	1" Square	Impacts per Minute	0-1,200 IPM
Max. Reverse Torque	4,725 Nm (3,500 ft-lbs)	Tool Weight	14.78 Kg (32.70 lbs)
Max. Tightening Torque	3,500 Nm (2,600 ft-lbs)		



RI60178E / RI60178

Li-ion 60V BRUSHLESS JUMBO 1" IMPACT WRENCH

- Powerful Impact Mechanism provides 4,725 Nm Max. Reverse Torque
- 7-Stage Auto Shut-Off for high power output
- Dual Battery System for double runtime
- Ideal for Pneumatic Tools Replacement
- Removable & 360° Adjustable Metal Side Handle
- 250+ 1-1/4" Bolts per Charge on two 60V (2.5Ah/150Wh) Batteries



RI60178E




7-Stage Auto Shut-Off



RI60178



Model Number	RI60178	RI60178E
Voltage	60 Vdc	
Drive	1" Square	
Max. Reverse Torque	4,725 Nm (3,500 ft-lbs)	
Max. Tightening Torque	3,500 Nm (2,600 ft-lbs)	
Torque Setting Range	250-3,000 Nm (185-2,220 ft-lbs)	
No Load Speed	0-900 RPM	
Impacts per Minute	0-1,200 IPM	
Tool Weight	14.11 kg (31.0 lbs)	14.78 kg (32.7 lbs)

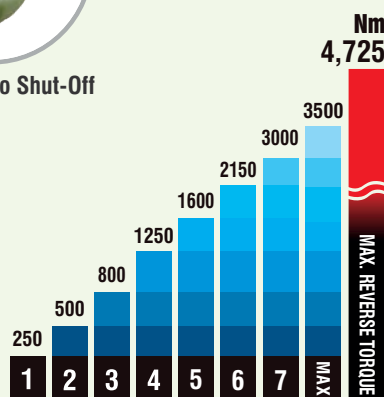




MULTI-FUNCTION CONCRETE VIBRATOR

- ◆ No Power Cords & Generator Required
- ◆ Good for Both Indoor & Outdoor Applications, Cramped Areas
- ◆ Easy to Install All Attachments

Interchangeable Attachments

(Vibrators / Wallbrator)

- ◆ ALLOW FOR VERSATILE APPLICATIONS

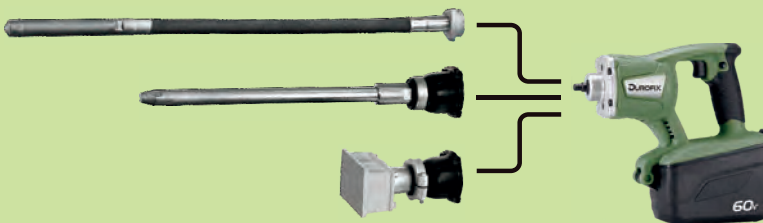


FLEXIBLE SHAFT

- ★ Just Unlock the Connector of Flexible Shaft (Turn Clockwise)



RIGID SHAFT / WALLBRATOR

- ★ Just Release 4 Screws of Anti-Vibration Cushion



+ BLDC MOTOR

+ BRUSHED MOTOR

3x RUN TIME

BATTERY PACK PROTECTIVE COVER

- ★ Prevents damage due to contamination.



RZ6008-28DL / RZ6008-25DS

Li-ion 60V BRUSHLESS (Rigid Shaft) Concrete Vibrator



Model Number	RZ6008-28DL	RZ6008-25DS
Voltage	60 Vdc	
No Load Vibrations / Min.	12,500 VPM	13,000 VPM
Vibration Head (Dia. x Length)	Ø 1-1/8" x 25" (Ø 28 x 635 mm)	Ø 1" x 17-5/8" (Ø 25 x 447 mm)

Model Number	RZ6008-28DL	RZ6008-25DS
Rigid Shaft Assembly Length	27-15/16" (710 mm)	20-9/16" (522 mm)
Max. Running Time per pack	100 min.	120 min.
Overall Length	936 mm	748 mm
Tool Weight	5.12 kg (11.20 lbs)	4.22 kg (9.28 lbs)

RZ6008-28FPL / RZ6008-28FP

Li-ion 60V BRUSHLESS (Flexible Shaft) Concrete Vibrator



Model Number	RZ6008-28FPL	RZ6008-28FP
Voltage	60 Vdc	
No Load Vibrations / Min.	13,000 VPM	12,500 VPM
Vibration Head (Dia. x Length)	Ø 1-1/8" x 7-5/16" (Ø 28 x 186 mm)	
Flexible Shaft Assembly Length	48-5/16" (1,228 mm)	32-7/16" (824 mm)

Model Number	RZ6008-28FPL	RZ6008-28FP
Max. Running Time per pack	130 min.	200 min.
Overall Length	1,474 mm	1,070 mm
Tool Weight	4.92 kg (10.82 lbs)	3.92 kg (8.62 lbs)

RZ6008-KCA

Li-ion 60V BRUSHLESS Concrete Wallbrator

Wallbrator is designed for all types of ICF (Insulating Concrete Form) applications. The tool's high-speed, low-impact vibration ensures proper concrete consolidation with one pass without damaging the ICF's surface.

Model Number	RZ6008-KCA
Voltage	60 V
No Load Vibrations / Min.	9,500 VPM
Vibration Head (Dia. x Length)	Ø 76 x 133 mm (Ø 3" x 5-1/4")
Wallbrator Assembly Length	169.5 mm (6-11/16")
Running Time per Pack	130 min.
Overall Length	396 mm
Tool Weight	4.02 kg (8.84 lbs)





20V SERIES

EXTENDED MOTOR LIFE

LONGER WORKING TIME

Charger v.s Li-ion Battery Pack

			 DC20TW26-30	 DC20UN26-60A	 DC20UN26-C40	 DC20UN26-C60
NEW	12.0Ah 20V	 B2035LE-3 BATTERY INDICATOR			200 Min.	180 Min.
NEW	8.0Ah 20V	 B2035LE-2 BATTERY INDICATOR			135 Min.	110 Min.
NEW	4.0Ah 20V	 B2035LE BATTERY INDICATOR	70 Min.	70 Min.	70 Min.	60 Min. QUICK CHARGE
NEW	9.0Ah 20V	 B2029LC-3 BATTERY INDICATOR			160 Min.	130 Min.
NEW	6.0Ah 20V	 B2029LC-2 BATTERY INDICATOR	100 Min.	100 Min.	100 Min.	95 Min.
	5.0Ah 20V	 B2029LB-2 BATTERY INDICATOR	80 Min.	80 Min.	80 Min.	70 Min.
	4.0Ah 20V	 B2029LA-2 BATTERY INDICATOR	70 Min.	70 Min.	70 Min.	60 Min. QUICK CHARGE
	2.0Ah 20V	 B2029LA BATTERY INDICATOR	40 Min. QUICK CHARGE	40 Min. QUICK CHARGE	40 Min. QUICK CHARGE	30 Min. QUICK CHARGE

LI-ION BATTERY TECHNOLOGY



INTELLIGENT BATTERY MANAGEMENT SYSTEM

Built-in Individual Cell Voltage Detection
Circuit for Charge Control in Battery Pack



HIGH-POWER EXTENDED LIFE BATTERY

Delivers high charger capacity with
low internal impedance for maximum
power delivery and exceptional run time.




LONGTIME STORAGE

No memory effect,
low self discharge
and always ready for use.

**EXTENDED MOTOR LIFE
LONGER WORKING TIME**

20v



RI20149

Li-ion 20V BRUSHLESS Impact Driver

• 4-ASSISTANCE MODES

One compact impact driver can conquer all the different fastening jobs from small screw, ordinary bolt, high tension bolt to self-tapping screw.

• 4-IMPACT MODES

Provides precise fastening control for a wide range of applications.

- Durable metal gearbox housing
- Built-in LED light • Battery indicator


Model Number	RI20149			
Voltage	20 Vdc			
Drive	1/4" Hex Shank			
Torque Setting	30 Nm	150 Nm	180 Nm	200 Nm
No Load Speed (rpm)	0-1,200	0-2,300	0-3,200	0-3,600
Impacts per Minute (ipm)	0-2,200	0-3,500	0-3,800	0-4,200
Tool Weight	1.71 kg (3.76 lbs)			

RI20174

Li-ion 20V BRUSHLESS Impact Wrench

- Electronic torque & speed control
- Longer running time & life cycle
- 3 fastening modes for different applications
- Durable metal gearbox housing
- Built-in LED light • Battery indicator

Model Number	RI20174	
Voltage	20 Vdc	
Drive	1/2" Square	
Max. Reverse Torque	800 Nm (590 ft-lbs)	
Tightening	Auto-shutoff	100 / 300 Nm (73 / 221 ft-lbs)
	Max. Torque	500 Nm (369 ft-lbs)
No Load Speed	0-1,500 / 0-1,800 / 0-2,100 RPM	
Impacts per Minute	0-3,000 IPM	
Tool Weight	1.81 kg (3.98 lbs)	

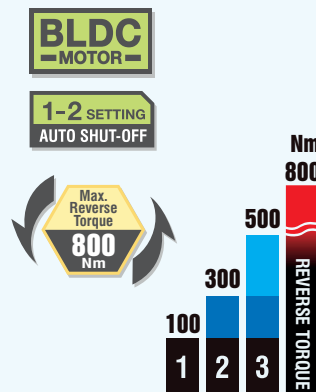



BRUSHLESS IMPACT WRENCH

- ◆ 3 fastening modes for different applications



RI20174A1

Li-ion 20V BRUSHLESS Impact Wrench

- Electronic torque & speed control
- Longer running time & life cycle
- 3 fastening modes for different applications
- Durable metal gearbox housing
- Built-in LED light • Battery indicator


Model Number	RI20174A1
Voltage	20 Vdc
Drive	1/2" Square
Max. Reverse Torque	800 Nm (590 ft-lbs)
Tightening Torque (Auto-shutoff)	100 / 200 / 300 Nm (73 / 147 / 221 ft-lbs)
No Load Speed	0-1,500 / 0-1,800 / 0-2,100 RPM
Impacts per Minute	0-3,000 IPM
Tool Weight	1.81 kg (3.98 lbs)

RI20173

Li-ion 20V BRUSHLESS Impact Driver

- Electronic torque & speed control
- Longer running time & life cycle
- 3 fastening modes for different applications
- Durable metal gearbox housing
- Built-in LED light • Battery indicator

Model Number	RI20173
Voltage	20 Vdc
Drive	1/4" Hex Shank
Max. Torque	100 / 180 / 220 Nm (73 / 133 / 162 ft-lbs)
No Load Speed	0-1,200 / 0-1,900 / 0-3,000 RPM
Impacts per Minute	0-3,000 IPM
Tool Weight	1.81 kg (3.98 lbs)



**EXTENDED MOTOR LIFE
LONGER WORKING TIME**

20v



RI2002-6

Li-ion 20V BRUSHLESS

3/4" Jumbo Impact Wrench

- Longer running time & life cycle
- 1,650 Nm max. reverse torque
- Durable metal gearbox housing
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status

Model Number	RI2002-6
Voltage	20 Vdc
Drive	3/4" Square
Max. Reverse Torque	1,650 Nm (1,218 ft-lbs)
Max. Tightening Torque	350 / 600 / 1,100 Nm (260 / 450 / 812 ft-lbs)
No Load Speed	0-950 / 0-1,300 / 0-1,700 RPM
Impacts per Minute	0-2,000 IPM
Tool Weight	3.60 kg (7.92 lbs)



RI2002

Li-ion 20V BRUSHLESS

1/2" Jumbo Impact Wrench

- Longer running time & life cycle
- 1,500 Nm max. reverse torque
- Durable metal gearbox housing
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status

Model Number	RI2002
Voltage	20 Vdc
Drive	1/2" Square
Max. Reverse Torque	1,500 Nm (1,100 ft-lbs)
Max. Tightening Torque	350 / 600 / 1,000 Nm (260 / 450 / 738 ft-lbs)
No Load Speed	0-950 / 0-1,300 / 0-1,700 RPM
Impacts per Minute	0-2,000 IPM
Tool Weight	3.30 kg (7.26 lbs)


RI20168-6

Li-ion 20V BRUSHLESS

3/4" Jumbo Impact Wrench

- Longer running time & life cycle
- 2,175 Nm max. reverse torque
- Durable metal gearbox housing
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status


Model Number	RI20168-6
Voltage	20 Vdc
Drive	3/4" Square
Max. Reverse Torque	2,175 Nm (1,605 ft-lbs)
Max. Tightening Torque	450 / 600 / 1,450 Nm (332 / 450 / 1,070 ft-lbs)
No Load Speed	0-1,000 / 0-1,400 / 0-1,800 RPM
Impacts per Minute	0-2,200 IPM
Tool Weight	3.59 kg (7.89 lbs)





BRUSHLESS 5" ANGLE GRINDER

- ◆ Lock-on slide switch provides user comfort in extended use application



RI20168

Li-ion 20V BRUSHLESS 1/2" Jumbo Impact Wrench

- Longer running time & life cycle
- 2,025 Nm max. reverse torque
- Durable metal gearbox housing
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status


Model Number	RI20168
Voltage	20 Vdc
Drive	1/2" Square
Max. Reverse Torque	2,025 Nm (1,495 ft-lbs)
Max. Tightening Torque	450 / 600 / 1,350 Nm (332 / 450 / 996 ft-lbs)
No Load Speed	0-1,000 / 0-1,400 / 0-1,800 RPM
Impacts per Minute	0-2,200 IPM
Tool Weight	3.54 kg (7.78 lbs)

RI20112

Li-ion 20V BRUSHLESS Angle Impact Wrench

- Longer running time & life cycle
- Angled compact head allows to safely use this tool in narrow spaces
- Durable metal gearbox housing
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status

Model Number	RI20112-3	RI20112-4
Voltage	20 Vdc	
Drive	3/8" Square	1/2" Square
Max. Reverse Torque	300 Nm (221 ft-lbs)	375 Nm (277 ft-lbs)
Max. Torque	50 / 80 / 200 Nm (37 / 59 / 147 ft-lbs)	60 / 100 / 250 Nm (44 / 73 / 185 ft-lbs)
No Load Speed	0-1,500 / 0-1,800 / 0-2,100 RPM	
Impacts per Minute	0-3,000 IPM	
Tool Weight	1.80 kg (3.96 lbs)	



RK20118

Li-ion 20V BRUSHLESS 13 mm 2-Speed Jumbo Hammer Drill

- Longer running time & life cycle
- 21 torque settings + hammer drill mode + drill mode
- All metal gearbox housing
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status

Model Number	RK20118
Voltage	20 Vdc
Chuck Capacity	13 mm
Max. Torque	100 Nm (73 ft-lbs)
No Load Speed	0-550 / 0-2,000 RPM
Blows per Minute	30,000 BPM
Tool Weight	2.25 kg (4.95 lbs)



RG2019

Li-ion 20V BRUSHLESS 5" Angle Grinder

- Longer running time & life cycle
- Lock-on slide switch provides user comfort in extended use application
- Spindle lock button design for easy grinding disc change
- Three-position side handle provides user comfort and reduces user's fatigue
- Needle bearing construction for extra durability and longer tool life
- Durable metal gearbox housing
- Battery indicator shows battery status

Model Number	RG2019
Voltage	20 Vdc
Disk Size	125 mm (5")
Spindle Thread	M14
No Load Speed	8,500 RPM
Tool Weight	2.30 kg (5.06 lbs)

RV20103

Li-ion 20V BRUSHLESS Rivet Nut Tool

- Electronic torque & speed control
- Simple and safe drilling of the blind rivet nuts
- Fast and simple change system for threaded mandrels
- Automatic switchover from setting to drilling
- Constant setting speed
- Built-in LED light • Battery indicator

Model Number	RV20103
Voltage	20 Vdc
Rivet Nut Size	M4 / M5 / M6 / M8 / M10
Max. Torque	100 / 180 / 220 Nm (73 / 133 / 162 ft-lbs)
No Load Speed	0-1,200 / 0-1,900 / 0-3,000 RPM
Tool Weight	2.15 kg (4.73 lbs)



MAKE YOUR OWN COMBO KIT



RI12185


Li-ion 12V BRUSHLESS Impact Driver

- 4-Mode Intelligent Drive Control provides you with unmatched control in various fastening applications.
- Compact and ergonomic design at only 127mm long
- Battery indicator shows battery status
- Built-in LED light



Model Number	RI12185
Voltage	12 Vdc
Drive	1/4 Hex Shank
Max. Torque	170 Nm (125 ft-lbs)
Impacts per Minute	0-4,500 IPM
Tool Weight	0.93 kg (2.04 lbs)

4 MODE INTELLIGENT DRIVE CONTROL



- 1 For Low RPM
- 2 For High RPM
- 3 For Intelligent Auto Stop
- 4 For Intelligent Speed Down

RPM	1 0-1,500	2 0-3,600
	3 0-3,600	4 0-2,000



powered by
LI-ION TECH

12V CHARGERS & BATTERY PACK

*xx: Country or Region



DC12XX07-40



DC12XX07-C15



B1225LA



B1225LA-2

RI12184

Li-ion 12V BRUSHLESS Impact Wrench

- The impact wrench delivers an industry leading **540 Nm** of reverse torque.
- Auto-Shut-Off Mode in **Modes 1-3 setting** prevents over-fastening of bolts while doing reassembly work.
- **4-Mode Drive Control** provides you with unmatched control in various fastening applications.
- Compact and ergonomic design at only **132mm** long

Model Number	RI12184-3	RI12184
Voltage	12 Vdc	
Drive	3/8" Square	1/2" Square
Max. Reverse Torque	480 Nm (354 ft-lbs)	540 Nm (400 ft-lbs)
Max. Torque	300 Nm (220 ft-lbs)	340 Nm (250 ft-lbs)
Torque Control	3-Mode Auto Shut-off	
No Load Speed	0-2,800 RPM	
Impacts per Minute	0-3,200 IPM	
Tool Weight	1.48 kg (3.26 lbs)	



RI12183

Li-ion 12V BRUSHLESS Impact Driver

- The impact driver delivers an industry leading **220 Nm** of Max. torque.
- Auto-Shut-Off Mode in **Modes 1-4 setting** prevents over-fastening of bolts while doing reassembly work.
- **4-Mode Drive Control** provides you with unmatched control in various fastening applications.
- Compact and ergonomic design at only **132mm** long



Model Number	RI12183
Voltage	12 Vdc
Drive	1/4 Hex Shank
Max. Torque	220 Nm (163 ft-lbs)
Torque Control	4-Mode Driver Control
No Load Speed	0-3,600 RPM
Impacts per Minute	0-3,200 IPM
Tool Weight	1.46 kg (3.21 lbs)



RK12136 Li-ion 12V BRUSHLESS COMPACT HAMMER DRILL

- Lightweight & Compact size
- 20 torque settings + drill mode + hammer mode
- Responsive VSR Switch
- Battery indicator shows battery status
- Built-in LED light

Model Number	RK12136
Voltage	12 Vdc
Chuck	3/8"
Max. Torque	50 Nm (443 in-lbs)
No Load Speed	0-450 / 0-1,800 RPM

Capacity	Wood	Ø 20 mm
	Steel	Ø 10 mm
	Brick Wall	Ø 10 mm
Tool Weight	1.26 kg (2.77 lbs)	

RD12136 Li-ion 12V BRUSHLESS COMPACT DRILL / DRIVER

- Lightweight & Compact size
- 20 torque settings + drill mode
- Responsive VSR Switch
- Battery indicator shows battery status
- Built-in LED light

Model Number	RD12136
Voltage	12 Vdc
Chuck	3/8"
Max. Torque	50 Nm (443 in-lbs)
No Load Speed	0-450 / 0-1,800 RPM

Capacity	Wood	Ø 20 mm
	Steel	Ø 10 mm
Tool Weight	1.18 kg (2.60 lbs)	



RW1221 Li-ion 12V BRUSHLESS Ratchet Wrench

- Up to 162 Nm (120 ft-lbs) tightening torque by hand (RW1221-3)
- Great accessibility with 152 mm long extended neck
- Durable metal gearbox housing
- Angled compact head allows to safely use this tool in narrow space
- Forward/reverse lever

Model Number	RW1221-3	RW1221-2
Voltage	12 Vdc	
Drive	3/8" Square	1/4" Square
Max. Torque	75 Nm (55 ft-lbs)	40 Nm (30 ft-lbs)
No Load Speed	0-450 RPM	
Tool Weight	1.36 kg (3.00 lbs)	1.25 kg (2.75 lbs)



RW1210-4 / RW1210-3 Li-ion 12V BRUSHLESS Ratchet Wrench

- Longer Running Time & Life Cycle
- Ideal for work in tight spaces
- 95 Nm max. torque in power wrench mode (RW1210-4)
- Durable metal gearbox housing
- Angled compact head allows to safely use this tool in narrow space
- Forward/reverse lever

Model Number	RW1210-4	RW1210-3
Voltage	12 Vdc	
Drive	1/2" Square	3/8" Square
Max. Torque	95 Nm (70 ft-lbs)	88 Nm (65 ft-lbs)
No Load Speed	0-220 RPM	
Tool Weight	1.40 kg (3.08 lbs)	

RW1210-2 Li-ion 12V BRUSHLESS 1/4" Ratchet Wrench

- Longer Running Time & Life Cycle
- Ideal for work in tight spaces
- 50 Nm max. torque in power wrench mode
- Durable metal gearbox housing
- Angled compact head allows to safely use this tool in narrow space
- Forward/reverse lever

Model Number	RW1210-2
Voltage	12 Vdc
Drive	1/4" Square
Max. Torque	50 Nm (37 ft-lbs)
No Load Speed	0-400 RPM
Tool Weight	1.40 kg (3.08 lbs)





RY1204 Li-ion 12V BRUSHLESS Rotary Hammer Drill

- 2-Mode selector switch
- Side handle for reduces user's fatigue
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status



Model Number	RY1204	Blows per Minute	0-4,500 BPM	
Voltage	12 Vdc	Drill Capacity	Concrete	14 mm
Chuck	SDS Plus		Steel	10 mm
Impact Energy	1.3 J		Wood	13 mm
No Load Speed	0-1,300 RPM	Tool Weight	1.97 kg (4.33 lbs)	

RS1222 Li-ion 12V 75mm 2-Speed Mini Polisher / Sander

- 2-speed gearbox for optimum RPM matching applications
- Lock-on power switch for user convenience
- Spindle lock button for easy wheel changes
- Compact size and light weight
- Convenient two positioned side handle variable speed switch
- Battery indicator shows battery status

Model Number	RS1222
Voltage	12 Vdc
Speed Setting	8 Stages
Pad Size	3" (75 mm) / 5" (125 mm)
Sanding Disc Size	2" (50 mm) / 3" (75 mm)
No Load Speed	0-3,000 RPM / 0-9,500 RPM
Tool Weight	1.10 kg (2.40 lbs)



**8-SEGMENT
FINE-TUNING DIAL**



RC1222

Li-ion 12V 76mm Compact Cut-Off Tool

- 20,000 rpm for fast and accurate cutting performance
- Reversible blade rotation for ultimate cutting control
- Tool free guard adjustment for convenience and ease of use
- Incorporated super bright LED
- Battery indicator

Model Number	RC1222
Voltage	12 Vdc
Rotation Speed	20,000 RPM
Blade Size	76 mm
Arbor Size	ø10 mm
Cut Depth	16.3 mm
Tool Weight	1.10 kg (2.40 lbs)



BLDC
— MOTOR —



RZ1282

Li-ion 12V Compact Blower

- 8-speed settings & variable speed trigger increase control
- Compact size & rubber nozzle for tight spaces
- Axial fan for best combination of power & run-time
- Rubber nozzle removes debris in hard-to-reach places
- Wide sweeping nozzle efficiently clears debris in open spaces
- Lock-on switch reduces user fatigue

Model Number	RZ1282	Noise (dBA)	90
Voltage	12 Vdc	Use time	15-20 Minutes
Air Volume	0-150 CFM	Tool Weight	1.65 kg (3.63 lbs)
Air Flow Speed	80 MPH		

RI12104 / RI12104-2

Li-ion 12V Impact Wrench

- Compact and ergonomic design at only 158.3mm long
- Ideal for work in tight spaces
- Variable speed with reversible control and electric brake switch
- Rubber boots design
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status

Model Number	RI12104	RI12104-2
Voltage	12 Vdc	
Drive	3/8" Square	1/4" Square
Max. Torque	120 Nm (90 ft-lbs)	108 Nm (80 ft-lbs)
No Load Speed	0-2,400 RPM	
Impacts per Minute	0-3,100 IPM	
Tool Weight	0.90 kg (1.98 lbs)	





RI12105 Li-ion 12V Impact Driver

- Compact and ergonomic design at only 151mm long
- Ideal for work in tight spaces
- Variable speed with reversible control and electric brake switch
- Rubber boots design
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status

Model Number	RI12105
Voltage	12 Vdc
Drive	1/4" Hex Shank
Max. Torque	110 Nm (82 ft-lbs)
No Load Speed	0-2,400 RPM
Impacts per Minute	0-3,100 IPM
Tool Weight	0.90 kg (1.98 lbs)

RD12119 Li-ion 12V 3/8" 2-Speed Drill / Driver

- 2-speed gearbox for optimum RPM matching applications
- Ideal for work in tight spaces
- 18 torque settings + drill mode
- Variable speed with reversible control and electric brake switch
- Built-in LED light for convenient illumination during work
- Battery indicator shows battery status

Model Number	RD12119
Voltage	12 Vdc
Chuck capacity	10 mm (3/8")
Max. Torque	30 Nm (265 in-lbs)
No Load Speed	0-350 / 0-1,350 RPM
Tool Weight	1.20 kg (2.64 lbs)



RS1214

Li-ion 12V 75mm 2-Speed Mini Polisher

- 2-speed gearbox for optimum RPM matching applications
- Compact size and light weight
- Convenient two positioned side handle variable speed switch
- Battery indicator shows battery status

Model Number	RS1214
Voltage	12 Vdc
Pad Diameter	75 mm (3")
No Load Speed	0-2,800 RPM / 0-7,600 RPM
Tool Weight	0.88 kg (1.93 lbs)



RW1207

Li-ion 12V Ratchet Wrench

- Compact and ergonomic design at only 267.5mm long
- Ideal for work in tight spaces
- 40 Nm max. torque in power wrench mode
- Angled compact head allows to safely use this tool in narrow space
- Built-in LED light for convenient illumination during work
- Forward/reverse lever



Model Number	RW1207	
Voltage	12 Vdc	
Drive	1/4" Square	3/8" Square
Max. Torque	40 Nm (30 ft-lbs)	
No Load Speed	240 RPM	
Tool Weight	0.85 kg (1.87 lbs)	

RW1209

Li-ion 12V 3/8" Ratchet Wrench

- 60 Nm of max torque for fast removal
- Compact head design for use in tight spaces
- Fwd / rev switch provides easy directional changes
- Incorporated super bright LED
- Slim body with soft grip for comfort and control

Model Number	RW1209
Voltage	12 Vdc
Drive	3/8" Square
Max. Torque	60 Nm (45 ft-lbs)
No Load Speed	170 RPM
Tool Weight	0.89 kg (1.96 lbs)





*Measurement complied to ISO 6789

RW1218 Li-ion 12V 3/8" Ratchet Wrench

- Up to 135 Nm (100 ft-lbs) tightening torque by hand
- Great accessibility with 152 mm long extended neck
- 55 Nm max. torque in power wrench mode
- Durable metal gearbox housing
- Angled compact head allows to safely use this tool in narrow space
- Forward/reverse lever

Model Number	RW1218
Voltage	12 Vdc
Drive	3/8" Square
Max. Torque	55 Nm (40 ft-lbs)
No Load Speed	250 RPM
Tool Weight	1.25 kg (2.75 lbs)

RW1216 Li-ion 12V Ratchet Wrench

- Up to 162 Nm (120 ft-lbs) tightening torque by hand (RW1216-3)
- Great accessibility with 152 mm long extended neck
- Durable metal gearbox housing
- Angled compact head allows to safely use this tool in narrow space
- Forward/reverse lever

Model Number	RW1216-3	RW1216-2
Voltage	12 Vdc	
Drive	3/8" Square	1/4" Square
Max. Torque	88 Nm (65 ft-lbs)	40 Nm (30 ft-lbs)
No Load Speed	0-260 RPM	0-300 RPM
Tool Weight	1.36 kg (3.00 lbs)	1.25 kg (2.75 lbs)



RZ1290

Li-ion 12V Jobsite Fan

- Air performance up to 14 MPH and 270 CFM
- It has powerful magnets, spring-loaded clamp, & keyholes & pass-through holes
- 215-degree head rotation
- Speed settings: 0-100%

Model Number	RZ1290
Voltage	12V
Air Volume (CFM)	270
Air Speed (MPH)	14
Speed Setting	0-100%
LED Brightness	3 (High / Mid / Low)
Weight(w/o battery)	1.92 Kg (4.33 lbs)



SPRING LOADED
CLAMP



BUILT-IN MAGNETS



IP54



**USB
CHARGER**



3-Modes
• LED ALL ON
• LED HALF ON
• STROBE

RL1242

Li-ion 12V LED Lantern Light

- Up to 4.6 hours of run time in 400 Lumens, 28 hours of run time in 40 Lumens (2.0Ah)
- Quickly charges electronics with onboard 2.1A USB port
- Charge 12V battery with onboard 2.1A micro-USB C type port
- Lighting can be LED all on, LED half on & Strobe
- IP54 Rated: Water and Dust Resistant
- Two Stainless Steel Hooks: Designed to be used as a hook or a handle


Model Number	RL1242
Voltage	12 Vdc
LED Brightness	400 Lumens
USB Type-C (Input)	5V, 2.1A
USB Type-A (Output)	5V, 2.1A
Ambient Temperature	0°C~50°C
Tool Weight (w/o battery)	0.50 kg (1.10 lbs)

RJ1217

Li-ion 12V Mini Reciprocating Saw

- Compact Size & Lightweight
- Dual-Gear Counterbalance Mechanism
- Keyless Blade Clamp
- One-handed Operation
- Front Rubber Wrap
- Built-in Battery Indicator

Model Number	RJ1217
Voltage	12 Vdc
Stroke	5/8"
Head length	290 mm (11-7/16")
Stroke per Minute	0-3,000 spm
Tool Weight	1.22 kg (2.70 lbs)



Clamping jaw equipped can increase friction in operation to control the cutting position and provide smoother cutting and variable reduce for your projects.



RZ1230

Li-ion 12V Caulking Gun

- The Caulk and Adhesive Gun is the lightest, most compact cordless powered caulk gun. With up to 400 lbs. of pushing force and 130 psi injection pressure.
- The combination Variable Speed Trigger and Max-Speed dial allow.
- The 360 degree Rotating Collar delivers maximum control around turns.
- The tool also features auto-reversing anti-drip, a seal puncture tool and durable hang hook for versatility on the job.



**8-STAGES
SPEED SETTING**

Model Number	RZ1230	Pressure	130 psi
Voltage	12 Vdc	Speed	0.04"-0.31"/s (1mm-8 mm)/s
Capacity	10 oz	Speed setting	8 stages
Barrel Type	Composite Half-Barrel	Stroke	7.87" (200 mm)
Max. Pushing	400 lbs	Tool Weight	1.30 kg (2.86 lbs)

CS-25-12VU

USB Power Adapter

- Compact size maximizes portability for use on the Jobsite
- Compatible with in-vehicle USB ports for convenient on-the-go charging of G12 Batteries
- Power indicator allows fast checking of G12 battery charge

Model Number	CS-25-12VU
Voltage	12V
Input (USB-C)	5V @ 2.1A
Output (charging)	12 V
USB output	9V @ 1.6A 5V @ 2.1A
DC plug output	12 V
Tool Weight (w/o Battery)	0.20 lbs (0.09 kg)



Battery pack not included



Model No. DBG001

Canvas bag

- Waterproof, durable, with strap

RV456

Li-ion 4V Rechargeable Screwdriver



- Perfect for daily repairs and installations



- One-Touch Switch
- Bright LED light
- 3-Speed Adjustment



- **Clear Storage Case**
Keep your tools organized and ready to go



- **30-Piece Bit Set**
Swap bits effortlessly for any task

Model Number	RV456
Voltage	4 Vdc
Drive	1/4" Hex Bit Holder
Max. Torque	5.0 Nm (44 in-lbs)
No Load Speed	0-300 RPM
Tool Weight	0.29 kg (0.63 lbs)

RV439

Li-ion 4V Foldable Screwdriver

21 clutch setting
+ drill mode

2-speed gearbox

Automatic
spindle lock

Battery
indicator



Built-in LED light

Forward / reverse
switch

Dual position handle
straight and pistol grip



Li-ion 4V
Battery Pack

Model Number	RV439
Voltage	4 Vdc
Drive	1/4" Hex Bit Holder
Max. Torque	5.6 Nm (50 in-lbs)
No Load Speed	190 / 650 RPM
Tool Weight	0.44 kg (0.97 lbs)

TURN A REGULAR RATCHET INTO A DIGITAL RATCHET

- ◆ Audible torque confirmation by means of buzzer and LED flashing



RM604-4A / RM602-4A / RM602-3 DIGITAL TORQUE ADAPTER

- Static torque measurement
- Standard functions: torque setting, measurement setting, mode setting
- Operation in both clockwise and counter-clockwise directions
- LCD display shows N-m (or kg-cm, in-lb, ft-lb) measurements
- Audible torque confirmation by means of buzzer and LED flashing
- Easy to set up Set, peak or track modes



RM602-4A



RM602-3



Model Number	RM604-4A	RM602-4A	RM602-3
Drive	1/2" Square	1/2" Square	3/8" Square
Length	75 mm		
Width	47 mm		
Height	48 mm		
Accuracy	► CW $\pm 2\%$ ► CCW $\pm 3\%$		
Measured Torque Range	34-340 Nm (25.1-250.8 ft-lbs)	34-340 Nm (25.1-250.8 ft-lbs)	8-80 Nm (5.9-59 ft-lbs)

Model Number	RM604-4A	RM602-4A	RM602-3
Resolution	1 kg-cm, 0.1 N-m, 1 in-lb, 0.1 ft-lb		
Auto Shut-Off	After 3 Minutes of No Use	After 1 Minute of No Use	
Operating Temperature	0°C~50°C		
Storage Temperature	-10°C~60°C		
Battery	Coin Cell CR2032 X 2		
Tool Weight	0.20 kg (0.44 lbs)	0.20 kg (0.44 lbs)	0.14 kg (0.31 lbs)

■ The certification of accuracy provided per ASME and ISO Standards is 20% to 100% of full scale.

RM607-4 / RM601-3 DIGITAL TORQUE WRENCH

- Standard functions: torque setting, measurement setting, mode setting
- Operation in both clockwise and counter-clockwise directions
- LCD display shows kg-cm, N-m, in-lb, ft-lb measurements
- Audible torque confirmation by means of buzzer and LED flashing
- Easy to set up peak or track modes
- Anti-slip soft grip



Model Number	RM607-4	RM601-3
Drive	1/2" Square	3/8" Square
Head Type	Quick Release Ratchet	
Gear Teeth	45	
Length	440 mm	315 mm
Accuracy	► CW $\pm 2\%$ ► CCW $\pm 3\%$	
Measured Torque Range	20-200 Nm (14.8-147.5 ft-lbs)	5-50 Nm (3.7-36.9 ft-lbs)

Model Number	RM607-4	RM601-3
Resolution	1 kg-cm, 0.1 N-m, 1 in-lb, 0.1 ft-lb	
Auto Shut-Off	After 1 Minute of No Use	
Operating Temperature	0°C~50°C	
Storage Temperature	-10°C~60°C	
Battery	AAA Alkaline Battery X 4 (Battery not included)	
Tool Weight	1.00 kg (2.20 lbs)	0.64 kg (1.41 lbs)

■ The certification of accuracy provided per ASME and ISO Standards is 20% to 100% of full scale.

RM303-4A ANGLE DIGITAL TORQUE WRENCH

- Standard functions: torque setting, measurement setting, mode setting
- Operation in both clockwise and counter-clockwise directions
- LCD display shows kg-cm, N-m, in-lb, ft-lb measurements
- Audible torque confirmation by means of buzzer, LED flashing & vibration function
- Easy to set up peak or track modes
- Anti-slip soft grip



Model Number	RM303-4A
Drive	1/2" Square
Head Type	Quick Release Ratchet
Gear Teeth	72
Length	666 mm
Accuracy	► CW $\pm 1.5\%$ ► CCW $\pm 1.5\%$
Measured Torque Range	17-340 Nm (12.5-250.7 ft-lbs)

Angle Setting Range	1° - 720°
Resolution	1 kg-cm, 0.1 N-m, 1 in-lb, 0.1 ft-lb, 0.1°
Auto Shut-Off	After 2 Minute of No Use
Operating Temperature	-10°C~60°C
Storage Temperature	-20°C~70°C
Battery	AA Alkaline Battery X 2 (Battery not included)
Tool Weight	1.39 kg (3.06 lbs)

■ The certification of accuracy provided per ASME and ISO Standards is 20% to 100% of full scale.



บริษัท นานตีอินเตอร์เทรด จำกัด
NANDEE INTER-TRADE CO., LTD.

314,316,318,320,322 ซอยจันทน์ 32 ถนนจันทน์ แขวงทุ่งวัดดอน เขตสาทร กทม. 10120

☎ : 0-2675-8239
LINE : @nandeeintertrade
f : nandeeintertrade
🌐 : www.nandee.co.th
✉ : marketing@nandee.co.th
sales@nandee.co.th