


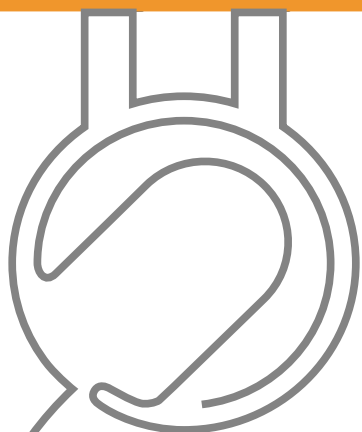

 **TRIENS**
SANKYO REELS, INC.

S-SERIES

Reliability and results

- High quality polyurethane hose
- Easy couplings are quipped


 Air	Model	Size	I.D./Length	Hose	MPa	Dimension(mm)	Weight(Kg)
	SHS-210Z	S	6.5mmx10m	PU	1.4	314x290x152	3.5
	SHS-310A	S	8.0mmx10m	PU	1.4	314x290x152	3.5
	SHR-35Z	M	8.0mmx15m	PU	1.4	408x384x173	6.8
 Cord	Model	Size	Outlet Cord	Power Rating	Dimension(mm)		Weight(Kg)
	SCS-310	S	1.25sq/3coresx10m	125V/6A 250V/6A	314x290x164		4.9
 Water	Model	Size	I.D./Length	Hose	MPa	Dimension(mm)	Weight(Kg)
	SWS-210A	S	6.0mmx10m	PVC	0.5	314x290x152	3.7

* Length of air hose can adjustable , Please contact phone number for more information

 Information For Cord Reel

Safety Device
Safety Thermostat
 **Thermostat sensor**
 prevents over heating of the reel. It shuts off the current when the temperature reached around 70°C and restores automatically when the temperature goes down.

Plug/Socket option




M-SERIES

M-series reels are designed for extreme space-restricted applications. Perfect for under work bench routing



Model	MMA-315
Fluid	Air
Hose	PU Hose
I.D.(mm)	8.0
Length (M)	15
End Fittings	Rc 1/2
Hose Joint	G 1/2 Female Thread
Fittings	R 1/2
Pressure	1.4 MPa
Temperature limits	-5~50°C
Hose Temperature	-30~60°C
Weight	15.9Kg

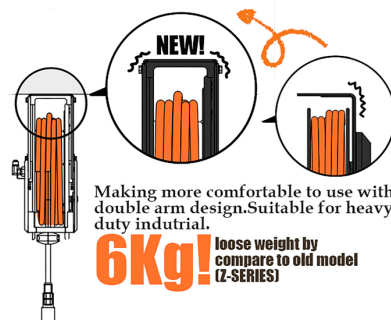NEW!

 Making more comfortable to use with double arm design. Suitable for heavy duty industrial.
6Kg! loose weight by compare to old model (Z-SERIES)

SBS-SERIES

Lightweight and flexible appearance

AIR	Model	I.D.(mm)	m	Dimension	MPa
	SBS-210A-C	6.5	10	290 x 157 x 314	1.4 MPa
	SBS-310A-C	8.0	10	290 x 157 x 314	1.4 MPa
CORD	Model	Power rating	Wire	m	Dimension
	SBS-310C-C	AC220V 6A	3 x 1.5mm ²	10	290 x 157 x 314
WATER	Model	I.D.(mm)	m	Dimension	MPa
	SBS-210W-C	6.0	10	290 x 157 x 314	0.5 MPa

 Air Hose Reels  Outlet Cord Reels  Water Reels



G-SERIES

Dual pedestal for heavy duty applications. Handles wide range of fluid

	Model	Outlet Hose		MPa		Inlet Hose		weight (kg)
		I.D.(mm)	m			fittings	m	
AIR	GS 1 A-315	8.0	15	Union G 3/8 Female	PVC	1.4	1.0	13.5
AIR	GS 1 A-410	12.7	10	Union G 1/2 Female	PVC	1.4	1.0	14.9
WATER	GS 1 W-315	8.0	15	Union G 3/8 Female	PVC	0.5	1.0	13.5
WATER	GS 1 W-410	12.7	10	Union G 1/2 Female	PVC	0.5	1.0	14.9
OIL	GS 1 O-310	9.5	10	Union G 3/8 Female	1 braid	7.0	1.0	15.7
OIL	GS 1 O-315	9.5	15	Union G 3/8 Female	1 braid	7.0	1.0	16.9



G-SERIES RUBBER HOSE

Equipped with authentic rubber hoses from Bridgestone

	Model	Outlet hose		MPa	inlet hose	Dimension
		I.D.(mm)	m			
AIR	GS1A-310	9.5	10	Rubber	1.4	1.0
AIR	GS1A-315	9.5	15	Rubber	1.4	1.0
AIR	GS1A-410	12.7	10	Rubber	1.4	1.0

more heat & oil resistant than hydraulic hoses

excellent in anti-static feature

Japan Quality hoses from Bridgestone

W-SERIES

Super Compact frame reel makes you install everywhere you want

- Unique design to fit in well with open space
- Easy-to integrate into other air tools and equipment

Model	Outlet Hose		MPa		Inlet Hose		Dimension(mm)			Weight (Kg)
	I.D.(mm)	m			Outlet	hose	A	B	C	
WHC-206B	6.5	6	1.4	0.8	Female G1/4	PU	228	272	146	2.7
WHC-303B	8.0	3	1.4	1.0	Female Rc3/8	PU	228	272	146	2.8

comes with mounting base set

Model	Outlet Cord		Power Rating		Inlet Hose	Dimension(mm)	Weight (Kg)
	Wire	Outlet					
WCC-306B	1.25 x 3	6	AC125V/BA AC250V/BA	0.8	plug (w/ground clip)	228 272 147	3.0

comes with mounting base set

Air Hose Reels

Outlet Cord Reels



PITABLOW

Compact size reel with magnet mount

- Spring-powered automatic rewind
- Same width and height as the length of a pencil

Model	Hose length (Minor side)	Coupler (Minor side)	Hose I.D. (mm)	Coupler (Main side)	Hose type	Pressure
ABR-202A	2 Meter	Female coupler	5.0 x 8.0mm	Male coupler	Air	0.8 MPa

This model is underdevelopment, any changes of specification and appearance will be notified in advance



Scan QR code to watch the how to use AIR BLOW REEL video!



บริษัท นานตีอินเตอร์เทรด จำกัด
NANDEE INTER-TRADE CO., LTD.

314,316,318,320,322 ซอยจันทน์ 32 ถนนจันทน์ แขวงทุ่งวัดดอน เขตสาทร กทม. 10120

☎ : 0-2675-8239
LINE : @nandeeintertrade
f : nandeeintertrade
🌐 : www.nandee.co.th
✉ : marketing@nandee.co.th
sales@nandee.co.th