


INOVANCE

Robot application scenarios



INDUSTRIAL ROBOTS

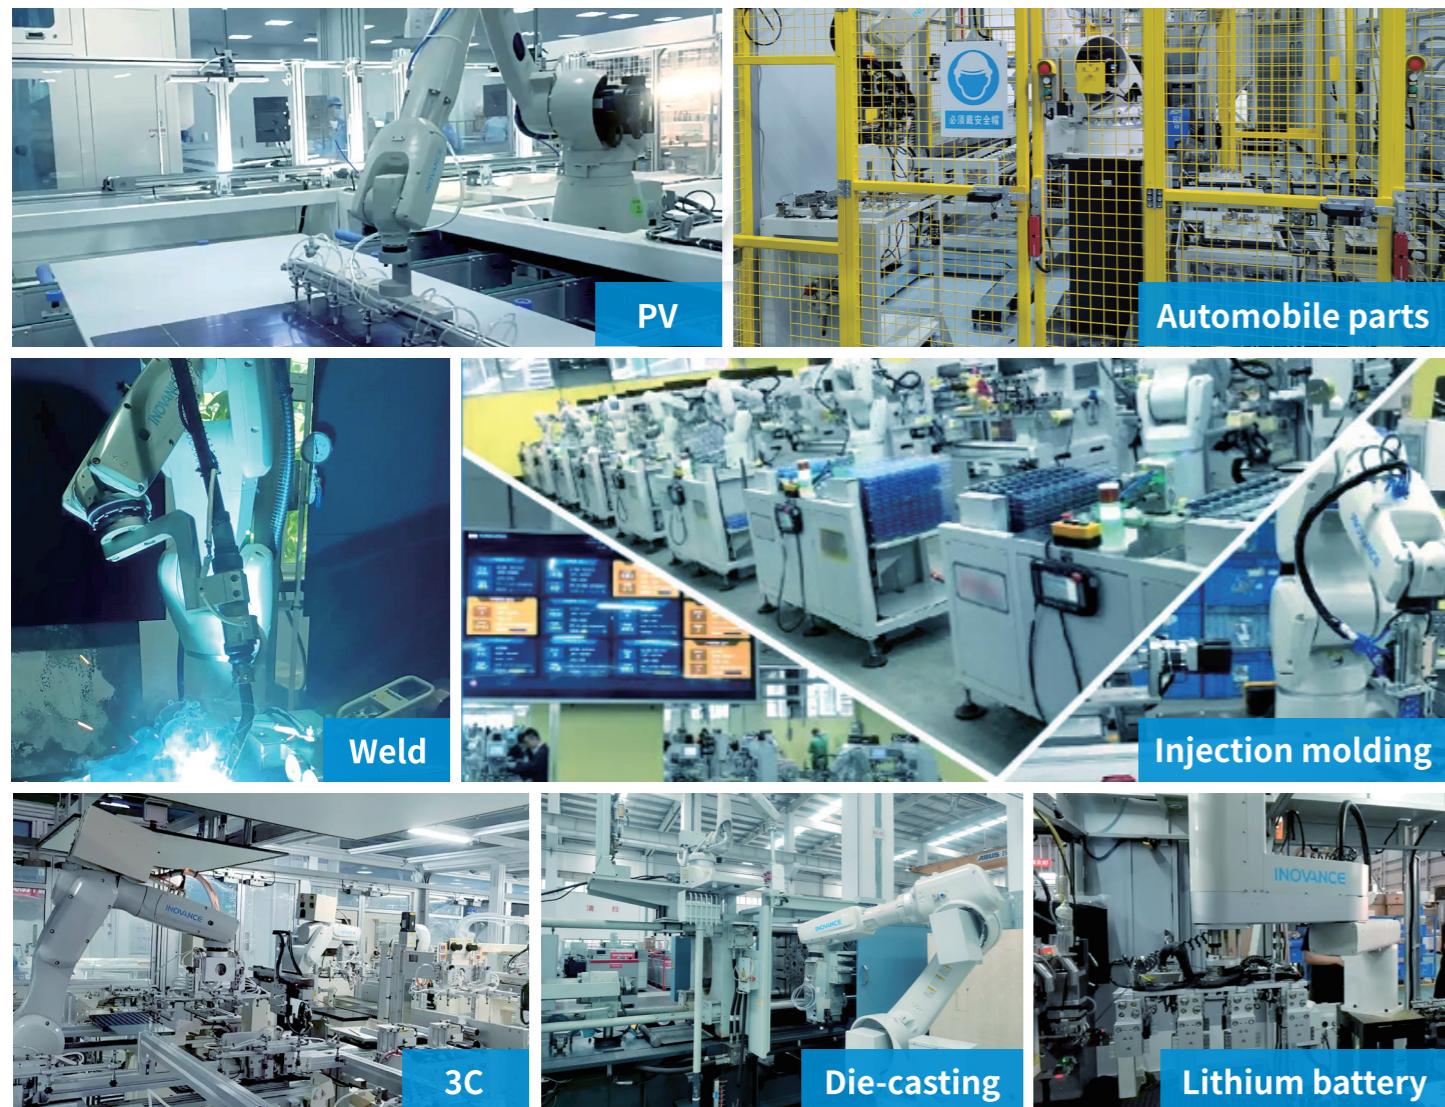

บริษัท นานดีอินเตอร์เทรด จำกัด
NANDEE INTER-TRADE CO., LTD.

314, 316, 318, 320, 322 ซอยจันทน์ 32 ถนนจันทน์ แขวงทุ่งวัดดอน เขตสาทร กรุงเทพฯ 10120


📞 : 0-2675-8239
LINE : @nandeeintertrade
📠 : nandeeintertrade
🌐 : www.nandee.co.th
✉️ : marketing@nandee.co.th
sales@nandee.co.th

010225300


n
NANDEE

www.nandee.co.th


Robot controller functions

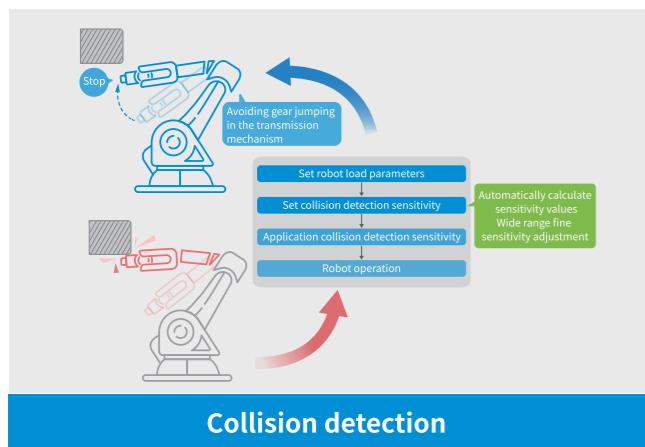


Real time detection of the robot's operating status can effectively avoid gear jumping caused by robot collisions at low speeds, and achieve rapid stopping at high speeds, reducing damage to the robot and equipment caused by collisions.

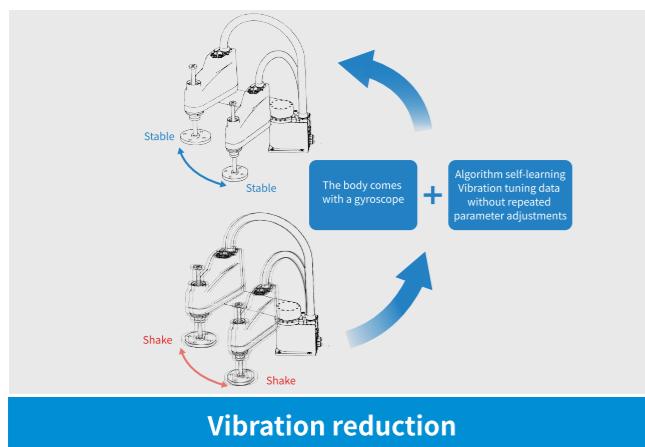


It can effectively reduce the shaking caused by resonance, eccentric load, and large load during the robot's movement process, making the robot's movement more stable and still ensuring excellent production performance during high-speed and high-precision operations.

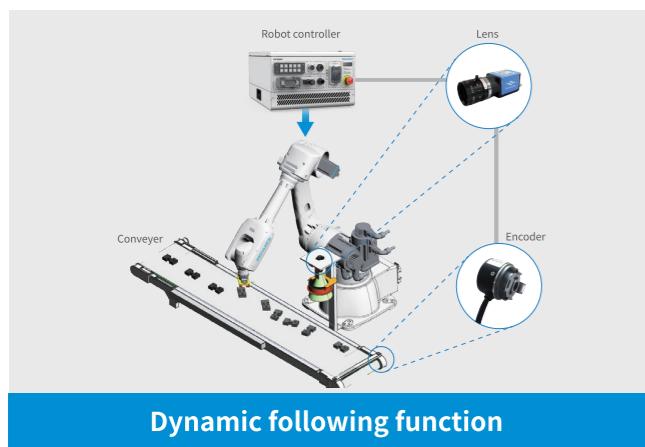


Whether it's a single product or multiple products of different types, colors, and sizes, it's easy to handle, switching between assembly line products with just one click. In situations where multiple machines are sorting at the same time, a set of vision can drive multiple robots, reducing the overall cost of the line.

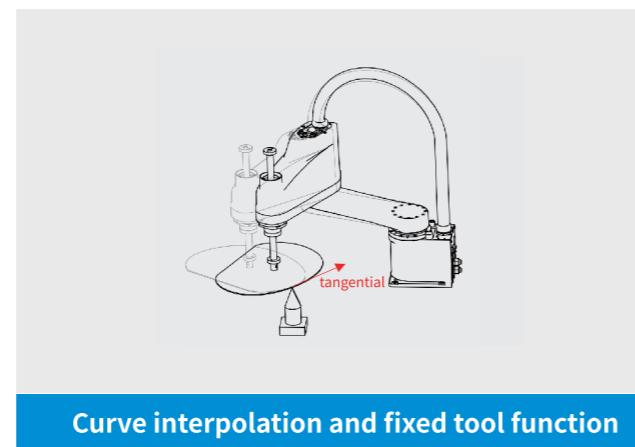

Even in situations where tools are fixed and robots hold workpieces for work, they can perform arbitrary curve interpolation according to requirements, and are widely used in processes such as gluing, polishing, and sewing. On the assembly line, interpolation of the trajectory in the following state can also be completed.

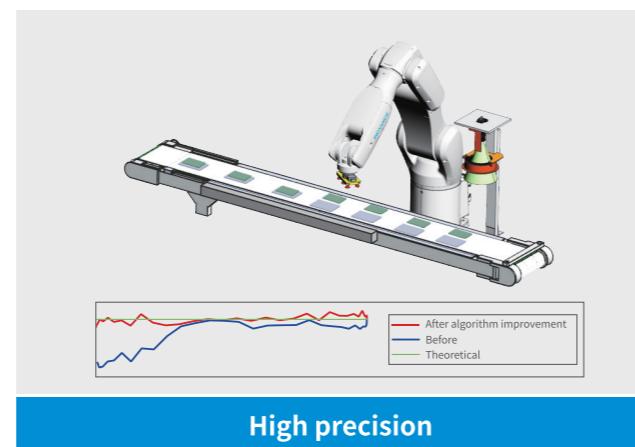

Fully considering the influence of the robot's body structure, external factors, and visual system on the robot's motion accuracy, high-precision control algorithms are adopted to meet the high-precision applications of loading, unloading, and fitting. This algorithm is also applicable to continuous motion trajectories.

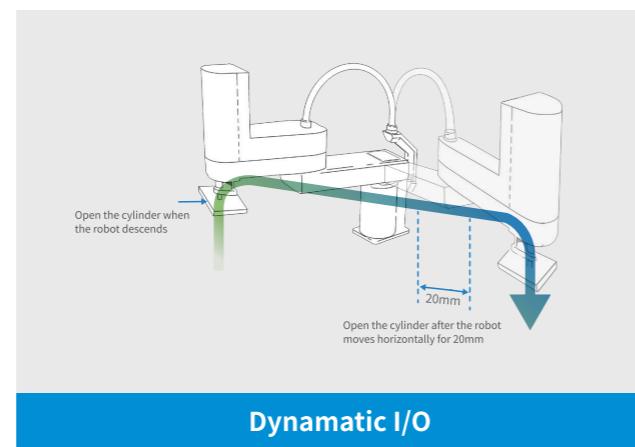

In the robot motion path, precise control of IO opening and closing actions can be carried out based on actual conditions, which is widely used in detection, high-speed transportation, dispensing, laser and other occasions. IO control can be specified based on the position, time, and distance of the movement.

Robot Controller



Controller Series	IRCB501 Series	IRCB501 High-protection Series
Mounting mode	Vertical mounting, horizontal mounting, 19" rack mounting	Vertical mounting, horizontal mounting, rack mounting
Standard I/Os	16 inputs and 16 NPN outputs (extendable)	
Communication interfaces	Ethernet interface: Used for TCP/IP, Modbus TCP, Ethernet/IP, MC communication EtherCAT-IN interface: EtherCAT slave -IN interface EtherCAT-OUT interface: EtherCAT master -OUT interface EtherCAT interface: Used for extension of external axes RS232/RS485 interface: Used for serial and Modbus RTU communication (RS485 only) USB2.0 interface: Used for backup/upload programs and export robot status information Optional interface: Profinet slave	
Control mode	PC programming platform control, teach pendant control, remote I/O control, remote Modbus control, and API control	
Power supply	Input voltage: Single-phase 200 VAC to 240 VAC, 10A/20A, 50 Hz to 60 Hz Max. power consumption: 3.1 kW (depending on the robot model)	Input voltage: Single-phase 200 VAC to 250 VAC, 23A, 50 Hz to 60 Hz Max. power consumption: 4.5 kW (depending on the robot model)
IP rating	IP20	IP54 + anti metal dust
Operating conditions	Temperature: 5° C to 40° C ; Relative humidity: 20% to 95% RH@30° C (non-condensing)	Temperature: 0° C to 45° C; Relative humidity: 20% to 95% RH@30° C (non-condensing)
Dimensions	Standard 330mmx338.5mmx130mm	High-Power 330mmx400mmx130mm
Weight	8kg	10kg
Applicable Robots	SCARA: IR-S4/7/10 Series, IR-TS4/5 Series 6-Axis: IRS311-7 Series, IR-R4/R4H Series	SCARA: IR-S20 Series, IR-GS20 Series, IR-S50 Series 6-Axis: IR-R11 Series
	6-Axis: IR-R10 Series, IR-R20 Series SCARA: IR-S50 Series (Optional) High-Power 6-Axis: IRS311-7 Series, IR-R4 Series, IR-R11 Series (Optional)	

Teach Pendant Expansion Card



Teach Pendant Model	IRTP80-L5-INT	Expansion Card Model	IRCB501-0016ETND-BD	IRCB501-1600END-BD	IRCB501-2ENID-BD	IRCB501-2PN-BD	IRCB501-FS-01-BD
cable length	5m	Description	General I/O expansion card with 16 NPN outputs	General I/O expansion card with 16 inputs	2-channel differential input incremental encoder expansion card	PROFINET expansion card	Safety function expansion card
screen	7-inch TFT-LCD, Touch screen operation, function keys	IP rating	IP54				
		Matching controller	IRCB501 Series,IRCB501 High-protection Series				

Technical Data

Scara Robot



Series	IR-S4	IR-S7			IR-S10			IR-S20			IR-GS20		IR-S50	IR-TS4	IR-TS5
Model	IR-S4-40Z15S3-INT	IR-S7-50Z20S3-INT	IR-S7-60Z20S3-INT	IR-S7-70Z20S3-INT	IR-S10-60Z20S3-INT	IR-S10-70Z20S3-INT	IR-S10-80Z20S3-INT	IR-S20-80Z42S5-INT	IR-S20-100Z42S5-INT	IR-GS20-80Z42S5-INT	IR-GS20-100Z42S5-INT	IR-S50-120Z40S5-INT	IR-TS4-35Z15S3-INT	IR-TS5-55Z15S3-INT	
Code	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Arm length	J1+J2(mm)	400	500	600	700	600	700	800	800	1000	800	1000	1200	350	550
	J1(mm)	225	225	325	425	225	325	425	350	550	350	550	600	175	275
	J2(mm)	175	275	275	275	375	375	375	450	450	450	450	600	175	275
Maximum speed	J1+J2(mm/s)	7200	7120	7850	8590	9100	9800	10500	9550	10800	9550	10800	7400	6180	9712
	J3(mm/s)	1300	1600	1600	1600	1600	1600	1600	1010	1010	1010	1010	750	1300	1300
	J4(° /s)	2600	2000	2000	2000	2700	2700	2700	705	705	705	705	600	2600	2000
Repeatability	J1+J2(mm)	±0.01	±0.02	±0.02	±0.02	±0.02	±0.02	±0.025	±0.025	±0.025	±0.025	±0.025	±0.05	±0.01	±0.015
	J3(mm)	±0.01	±0.01	±0.01	±0.01	±0.01	±0.01	±0.01	±0.01	±0.01	±0.01	±0.01	±0.02	±0.01	±0.01
	J4(°)	±0.01	±0.01	±0.01	±0.01	±0.01	±0.01	±0.01	±0.01	±0.01	±0.01	±0.01	±0.005	±0.01	±0.01
Load	Rated(kg)	2	3	3	3	5	5	5	10	10	10	10	-	2	2
	Maximum(kg)	4	7	7	7	10	10	10	20	20	20	20	50	4	5
Permissible moment inertia of J4	Rated(kg·m²)	0.005	0.01	0.01	0.01	0.02	0.02	0.02	0.5	0.5	0.5	0.5	-	0.005	0.01
	Maximum(kg·m²)	0.05	0.12	0.12	0.12	0.3	0.3	0.3	1	1	1	1	2.45	0.05	0.12
Mounting base dimensions(mm)		120x120(4-Ø9)	150x150(4-Ø9)	150x150(4-Ø9)	150x150(4-Ø9)	150x150(4-Ø9)	150x150(4-Ø9)	150x150(4-Ø9)	200x200(4-Ø16)	200x200(4-Ø16)	200x200(4-Ø16)	200x200(4-Ø16)	200X200(4-Ø14)	95X95X160(6-Ø6.6)	95X95X160(6-Ø6.6)
Weight(excluding cables)		12kg	17kg	17.5kg	19kg	18.5kg	19kg	20.5kg	53kg	56kg	54kg	57kg	124kg	18.5kg	20kg
Press-in force of J3		100N	150N	150N	150N	200N	200N	200N	250N	250N	250N	250N	-	100N	150N
Customer signal line	15 (15pin:D-sub) /15 (15pin:D-sub) CAT5E								9(9 pin:D-sub), 15(15 pin:D-sub)						15 (15pin:D-sub) CAT5E
	Ø6 mm x 2, 0.59 Mpa Ø4 mm x 1, 0.59 Mpa								Ø6 mm x 2, 0.59 Mpa (6 kgf/cm²:86 psi) Ø4 mm x 2, 0.59 Mpa (6 kgf/cm²:86 psi)						Ø6 mm x 2, 0.59 Mpa Ø4 mm x 1, 0.59 Mpa
Operating conditions	Ambient temperature ^[1]	5~40° C (no excessive temperature changes)								5~40° C (no excessive temperature changes)					
	Relative humidity	10~80%								10~80%					
Shipment Conditions	Ambient temperature	-10°C ~55°C								-10°C ~55°C					
	Relative humidity	≤ 80% RH,non-condensing								≤ 80% RH,non-condensing					
Storage Conditions	Ambient temperature	-10°C ~55°C								-10°C ~55°C					
	Relative humidity	≤ 80% RH,non-condensing								≤ 80% RH,non-condensing					
Noise level ^[2]		Laeq=70dB(A)								Laeq=75dB(A)					
Maximum motion range	J1(°)	±132	±132	±132	±132	±132	±132	±132	±132	±132	±132	±132	±128	±225	±225
	J2(°)	±141	±150	±150	±150	±150	±150	±150	±152	±152	±152	±152	±150	±225	±225
	J3(mm)	150	200	200	200	200	200	200	420	420	420	420	400	150	150
	J4(°)	±360	±360	±360	±360	±360	±360	±360	±360	±360	±360	±360	±360	±720	±720
Standard cycle time(s) ^[3]		0.342	0.351	0.36	0.375	0.361	0.386	0.416	0.36	0.38	0.36	0.38	0.84	0.304	0.34
Certification		CE,cSGSus,KCs,Kc								CE,cSGSus,KCs,Kc					

- Note
- [1] If this product is used in a low temperature environment close to the lowest temperature of the product specification, or if it is suspended for a long time due to holidays and nights, it is recommended to warm up for 10 minutes before running
- [2] Noise test conditions: 4 joint linkage, 100% speed and acceleration, duty cycle 50%, measurement position: the front of the robot, 1000mm away from the action area, and more than 50mm from the base mounting surface.
- [3] Standard cycle time for 4kg SCARA: 1kg load, the time required for the robot to go back and forth with a gate command (300 mm horizontally, 25 mm vertically)
Standard cycle time for 7kg/10kg SCARA : 2kg load, the time required for the robot to go back and forth with a gate command (300 mm horizontally, 25 mm vertically)
Standard cycle time for 20kg SCARA : 2kg load, the time required for the robot to go back and forth with a gate command (300 mm horizontally, 25 mm vertically)
Standard cycle time for 50kg SCARA : 5kg load, the time required for the robot to go back and forth with a gate command (300 mm horizontally, 25 mm vertically)
Standard cycle time for 4kg/5kg Inverted SCARA : 1kg load, the time required for the robot to go back and forth with a gate command (300 mm horizontally, 25 mm vertically)

Technical Data

6-Axis Robot



Series	IR-R4	IR-R4H	IRS311-7		IR-R11	IR-R10			IR-R20	
Model	IR-R4-56S5-INT	IR-R4H-54S5-INT	IRS311-7-70TS5-INT	IRS311-7-90TS5-INT	IR-R11-90S5-INT	IR-R10-110S5-INT	IR-R10-140S5-B1-INT	IR-R10-200S5-B1-INT	IR-R20-170S5-B1-INT	
Code	-	-	-	-	-	-	-	-	-	
Structural style	Vertical axis cascading structure					Vertical axis cascading structure				
Number of Axes	6 axes					6 axes				
Maximum reach (mm)	560.6	545.7	717	911	901.9	1101.6	1422	2045	1723	
Repeatability (mm)	±0.01	±0.02	±0.02	±0.03	±0.02	±0.02	±0.05	±0.05	±0.05	
Maximum Load(kg)	4	4	7	7	11.3	10	10	10	20	
IP rating	IP40 (IP67 optional)	IP40 (IP67 optional)	IP65	IP65	IP40 (IP67 optional)	IP40 (IP67 optional)	IP65 (Wrist IP67)	IP65 (Wrist IP67)	Body: IP65 Wrist: IP67	
Max.Speed	J1 (° /s)	450	450	450	300	300	300	200	190	
	J2 (° /s)	460	460	380	280	225	225	200	175	
	J3 (° /s)	520	520	520	360	330	330	200	200	
	J4 (° /s)	560	560	550	550	450	450	375	400	
	J5 (° /s)	560	560	550	550	420	420	375	360	
	J6 (° /s)	900	900	1000	620	720	720	600	610	
Maxi-mummotion range	J1 (°)	±170	±170	±170	±170	±170	±170	±170	±170	
	J2 (°)	-120~+110	-120~+110	-135~+80	-125~+80	+100~+135	+100~+135	-160~+60	-155~+80	
	J3 (°)	-69~+205	-65~+195	-70~+190	-70~+190	-66~+210	-66~+210	-80~+160	-75~+160	
	J4 (°)	±190	±190	±190	±190	±190	±190	±180	±180	
	J5 (°)	±120	±120	±120	±120	±125	±125	±140	±140	
	J6 (°)	±360	±360	±360	±360	±360	±360	±360	±360	
Allowed wrist torque	J4 (N·m)	8.86	8.86	16.6	16.6	20.45	18.59	22	42	
	J5 (N·m)	8.86	8.86	16.6	16.6	20.45	18.59	22	42	
	J6 (N·m)	4.9	4.9	9.4	9.4	10.8	9.8	9.8	20	
Allowed wrist inertia	J4 (N·m)	0.2	0.2	0.47	0.47	0.6	0.6	0.63	1.18	
	J5 (N·m)	0.2	0.2	0.47	0.47	0.6	0.6	0.63	1.18	
	J6 (N·m)	0.067	0.067	0.15	0.15	0.2	0.2	0.2	0.5	
Customer connections	Wiring	12 signal lines 30V 0.5A	12 signal lines 30V 0.5A, 8 signal lines 30V 0.2A	12 signal lines 30V 0.5A	12 signal lines 30V 0.5A	12 signal lines 30V 0.5A	18 signal lines 30V 0.5A	18 signal lines 30V 0.5A	18 signal lines 30V 0.5A	
	Air	Φ4 mm x 4, 0.59 Mpa	Φ4 mm x 4, 0.59 Mpa	Φ4 mm x 2, 0.59 Mpa	Φ4 mm x 2, 0.59 Mpa	Φ4 mm x 4, 0.59 Mpa	Φ4 mm x 4, 0.59 Mpa	Φ8 mm x 1, 0.59 Mpa	Φ8 mm x 1, 0.59 Mpa	
Operating conditions	Ambient temperature(° C)	0~45					0~45			
	Relative humidity	5% to 95% RH (non-condensing)	5% to 95% RH (non-condensing)	5% to 95% RH (non-condensing)	5% to 95% RH (non-condensing)	5% to 95% RH (non-condensing)	5% to 95% RH (non-condensing)	10% to 80% RH (non-condensing)	10% to 80% RH (non-condensing)	
	Maximum Temperature Gradient(° C/min)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	
Shipment Conditions	Ambient temperature(° C)	-10~55					0~45			
	Relative humidity	≤ 95% RH,non-condensing					≤ 80% RH,non-condensing			
Storage Conditions	Ambient temperature(° C)	-10~55					0~45			
	Relative humidity	≤ 95% RH,non-condensing					≤ 80% RH,non-condensing			
Weight	24kg	24.5kg	38kg	40kg	45kg	47kg	130kg	245kg	240kg	
Controller	IRCB501 Series					IRCB501 Series			IRCB501 High-Protection Series	
Mounting mode	Floor mounted					Floor mounted				
Certification	CE,cSGSus,KCs,Kc					CE,cSGSus,KCs,Kc				