


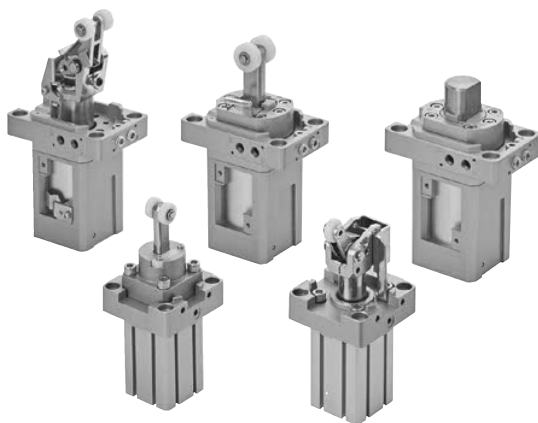


■ Specification

Model	PSB*	
Medium	Air	
Operating pressure range	0,2~1 MPa	
Proof pressure	1,5 MPa	
Ambient temperature	-5~+60°C (No freezing)	
Lubrication	Not required	
Cushion	With rubber cushion pad	
Sensor switch(*)	RCA for ø 50	RCB, RCE, RCE1, RDEP
Sensor switch holder	HS	—


* RCA, RCB, RCE, RCE1, PAEP specifications, please refer to page 8-6, 8, 10, 14.

■ Order example

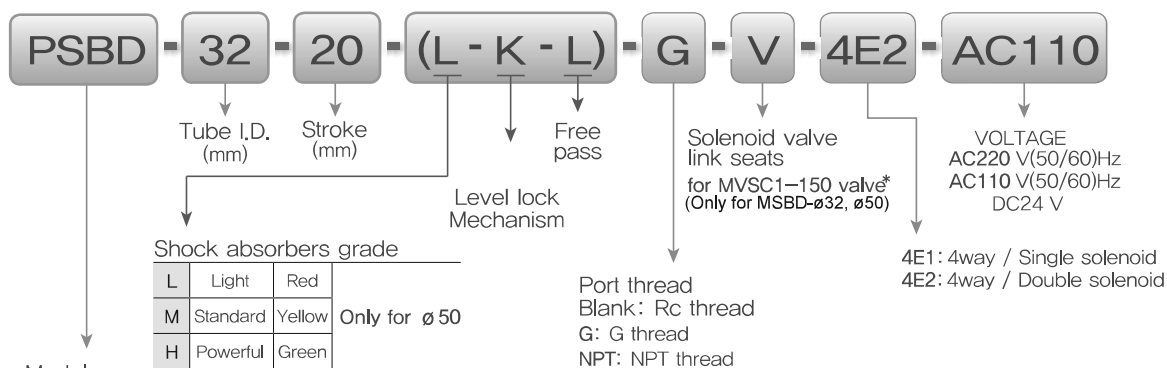


Type of cylinder	Operation type	Standard stroke	Magnet	Sensor switch	Weight
PSBD	Shockless stopper (Double acting with spring)	ø 32-20	○	RCE, RCE1, RDEP	740 g
		ø 50-30	○	RCA	1800 g
		ø 63-30	○	RCB, RCE, RCE1, RDEP	3680 g
		ø 80-40	○		6820 g

* MVSC1-150 specification, please refer to page 1-21 (Vol.1).

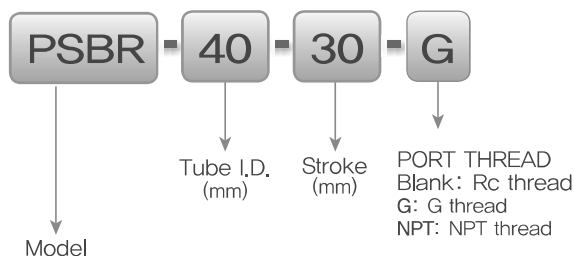


■ Piping diagram

Single acting




Double acting



Type of cylinder	Operation type	Standard stroke	Magnet	Sensor switch	Weight
PSBR	Stopper with roller (Double acting)	ø20-20	○	RCB	250 g
	Stopper with roller (Single acting-Spring extended)	ø32-20	○	RCE,RCE1,RDEP	740 g
		ø40-30	×	—	1400 g
		ø50-30	×	—	1800 g
PSBS	Direct stopper (Double acting)	ø20-10	○	RCB	192 g
		ø32-20	○	RCE,RCE1,RDEP	720 g
		ø50-30	○	RCA	1850 g

Pallet control stopper type

Shock absorber built-in



Absorbs the shock when the carried object stops, and stops the object softly on the right Position. There is an adapter between the lever and shock absorber, which straightens the inclined load on the lever and transmits it to the lever.

Lever lock mechanism

With this optional feature, the carried object is not pushed back by the lever. Also the Object returns to the right position after being lifted up. The lock is released by supplying air and lowering the rod.

Stopper mechanism

Guide bar equipped for fixing the direction of the roller lever.

Light aluminum

Main cylinder part, shock absorber, and roller lever are integrated in the aluminum die cast body. The best cylinder for the light and space-saving conveyor line.

Free pass mechanism

Setting the pass-plate on the lever holder, the lever is fixed in the OFF position. Use the optional feature when the carried object needs to pass over the cylinder.




Solenoid valve and sensor switch

Magnet-sensing sensor switch is available for MS** Reed or "solid state" switches with LED is fixed, not need to adjust the position, 5/2 solenoid Valve can be directly mounted on the cylinder.




■ PSBD $\phi 32 \sim 20$

Capacity

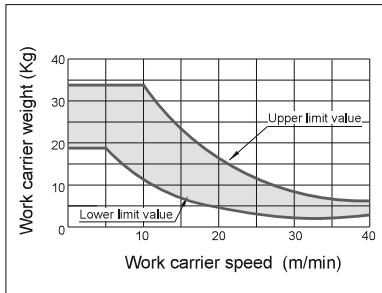


■ PSBD $\phi 32 \sim 20, \phi 50 \sim 30$

Normal lateral load

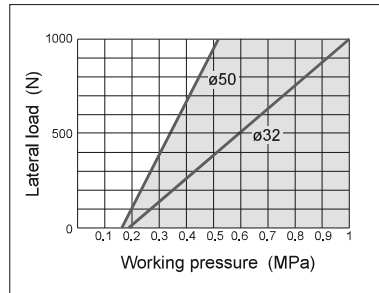


■ PSBD $\phi 50 \sim 30$


Capacity Light weight type

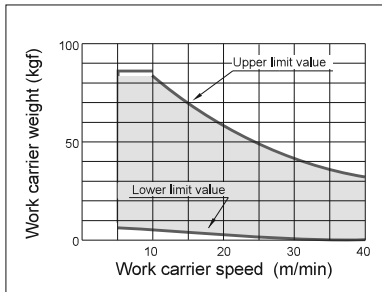

Capacity Standard type

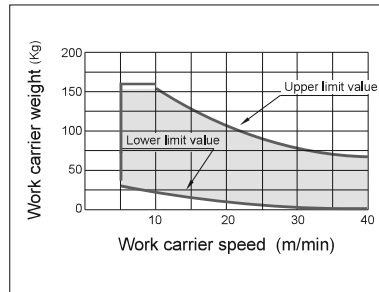


Capacity Heavy duty type

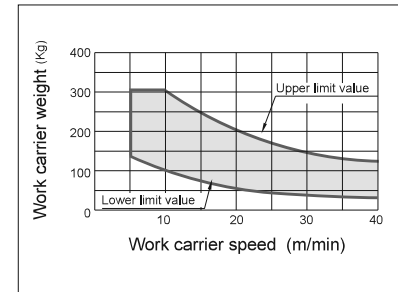


■ PSBD $\phi 63 \sim 30, \phi 80 \sim 40$


Capacity

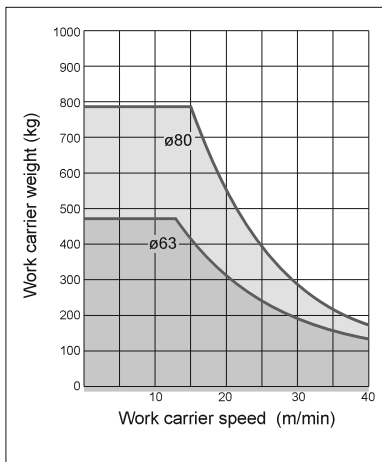


Normal lateral load

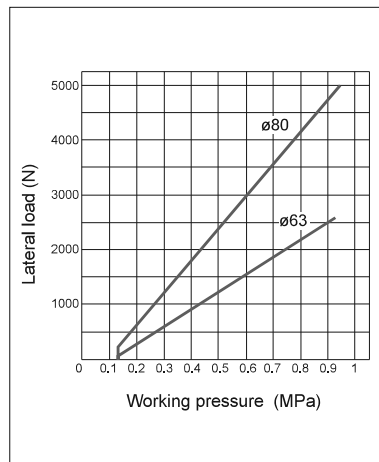


■ PSBD $\varnothing 32-20$

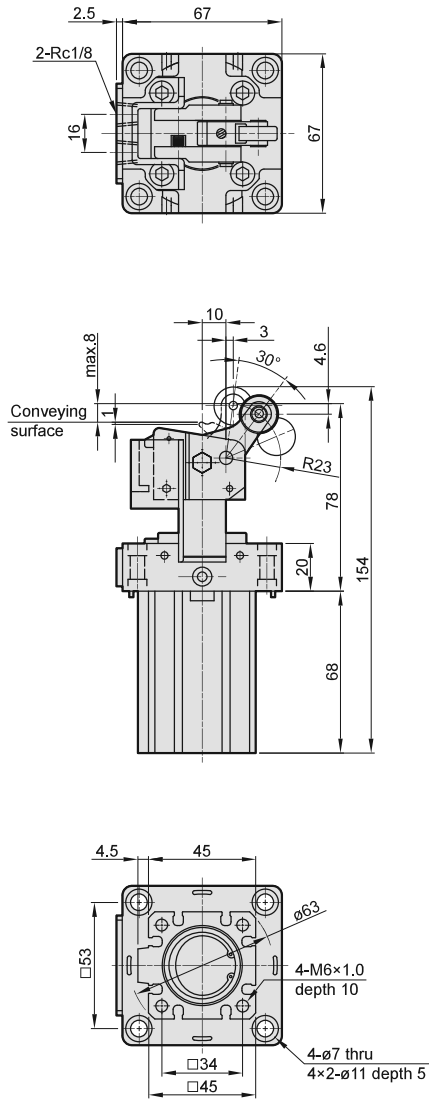


■ PSBD $\varnothing 32-20-V$

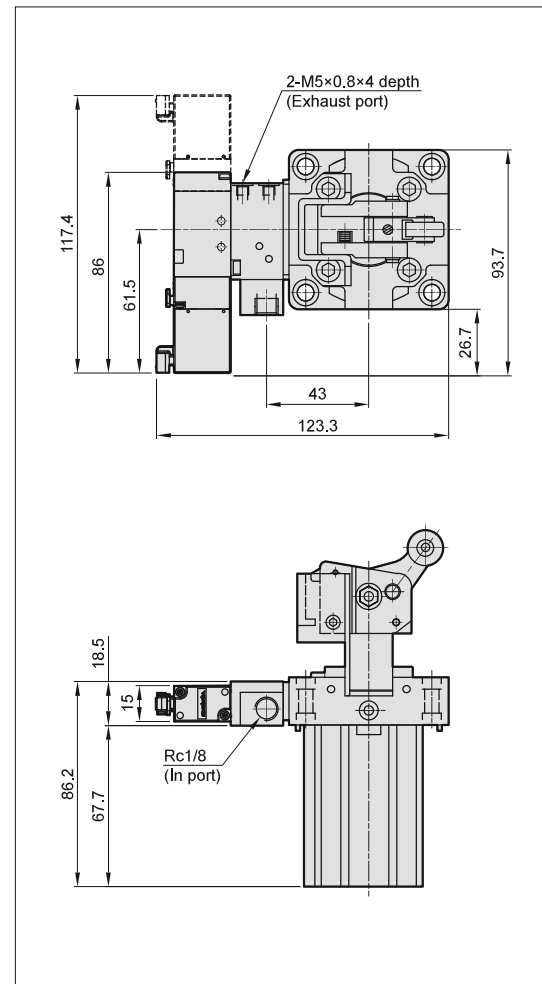


■ PSBD $\varnothing 50-30$

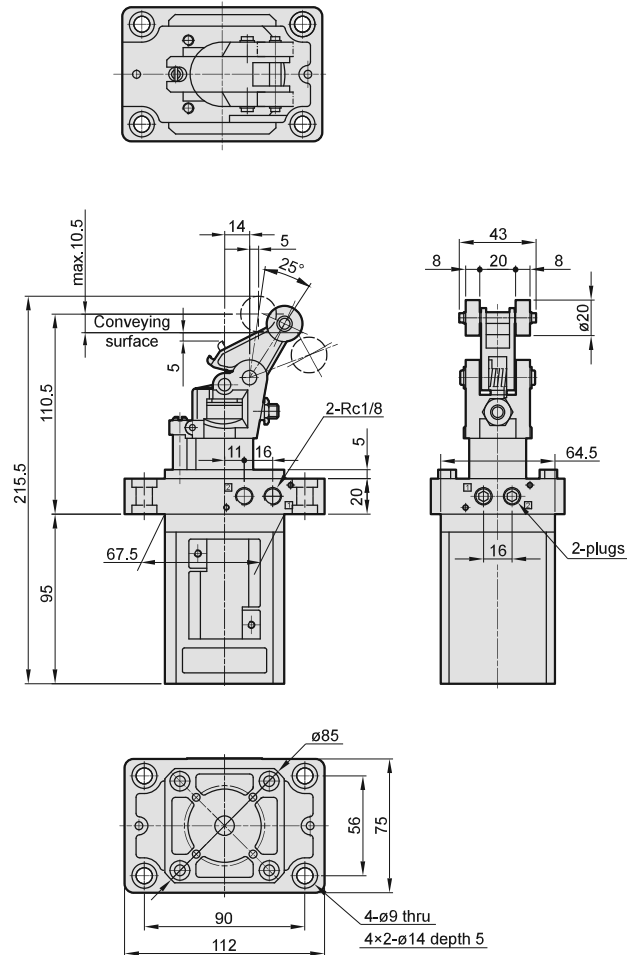

■ PSBD $\varnothing 50-30-V$

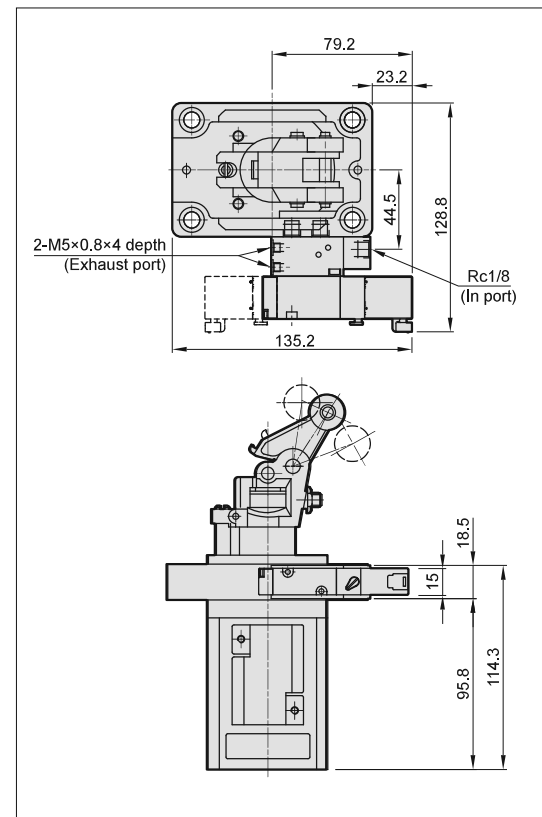


■ Option accessories

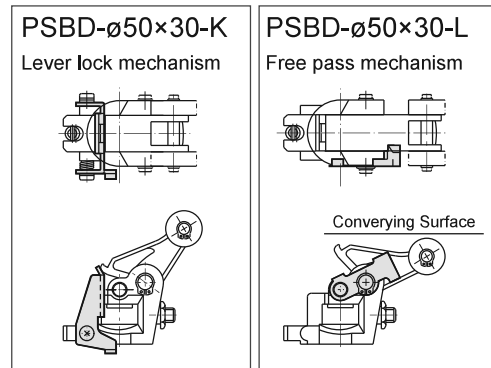


■ PSBD $\varnothing 63-30$

■ PSBD $\varnothing 80-40$

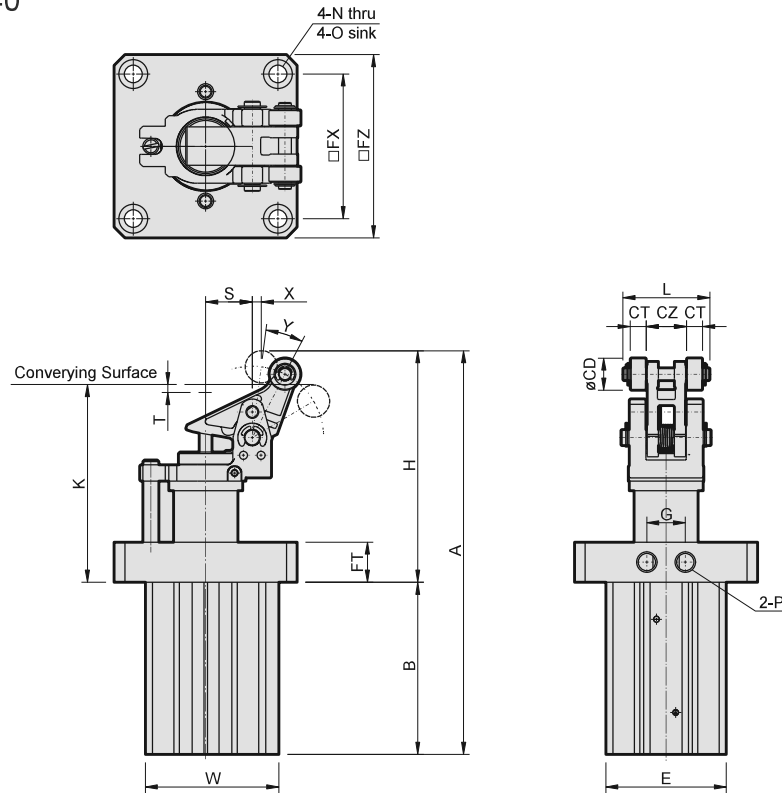


■ Option accessories

PSBD- $\varnothing 63-30-K$
PSBD- $\varnothing 80-40-K$
Lever lock mechanism




PSBD- $\varnothing 63-30-L$
PSBD- $\varnothing 80-40-L$
Free pass mechanism



Tube I.D.	Stroke	A	B	CD	CT	CZ	E	FT	FX	FZ	G	H	K	L	N	O	P	S	T	W	X	Y
63	30	251	107	20	10	25	75	25	90	114	24	144	123	54	$\varnothing 11$	$\varnothing 18 \times 6$ depth	Rc1/4	29	5	83	6	20°
80	40	322.5	145	25	12	30	94	25	110	140	24	177.5	150	63	$\varnothing 13$	$\varnothing 20 \times 6$ depth	Rc1/4	36	4	102	8	22°


■ PSBR

Capacity

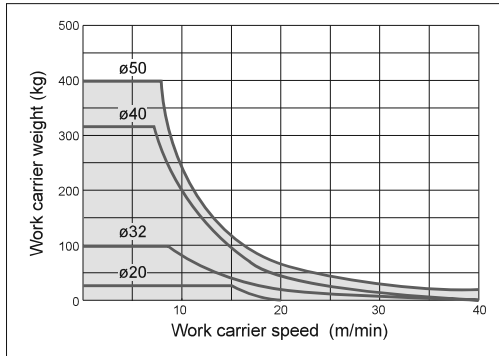


■ PSBR

Normal lateral load

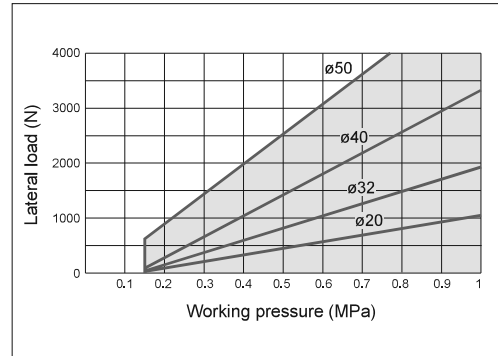


■ PSBS

Capacity

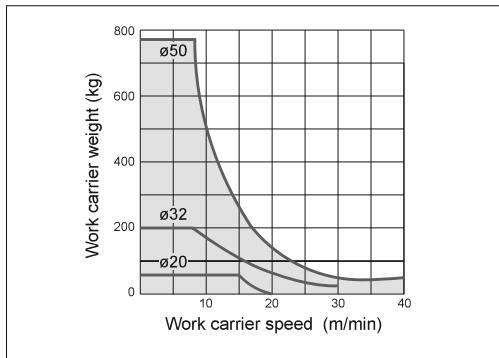


■ PSBS


Normal lateral load

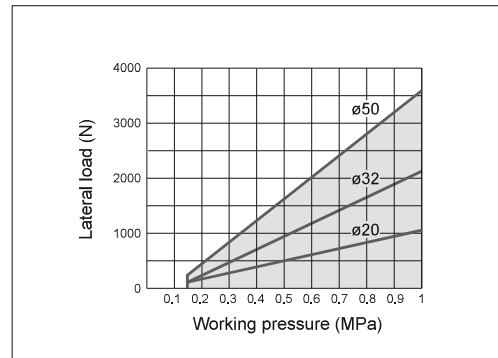


■ PSBR $\varnothing 20-20$

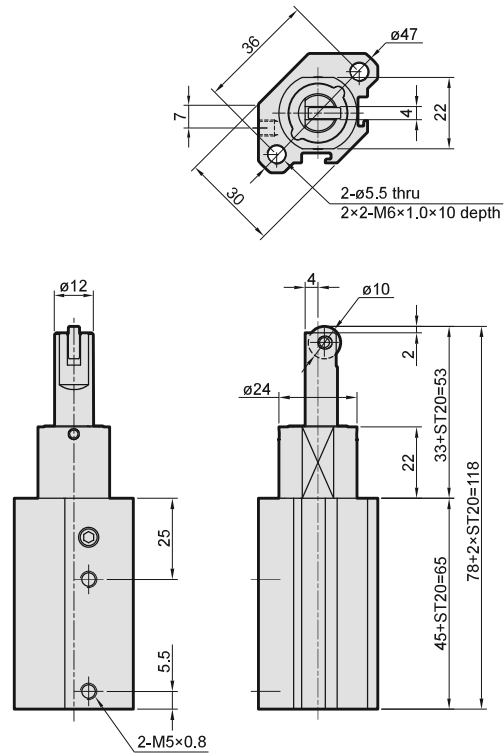


■ PSBR $\varnothing 32-20$

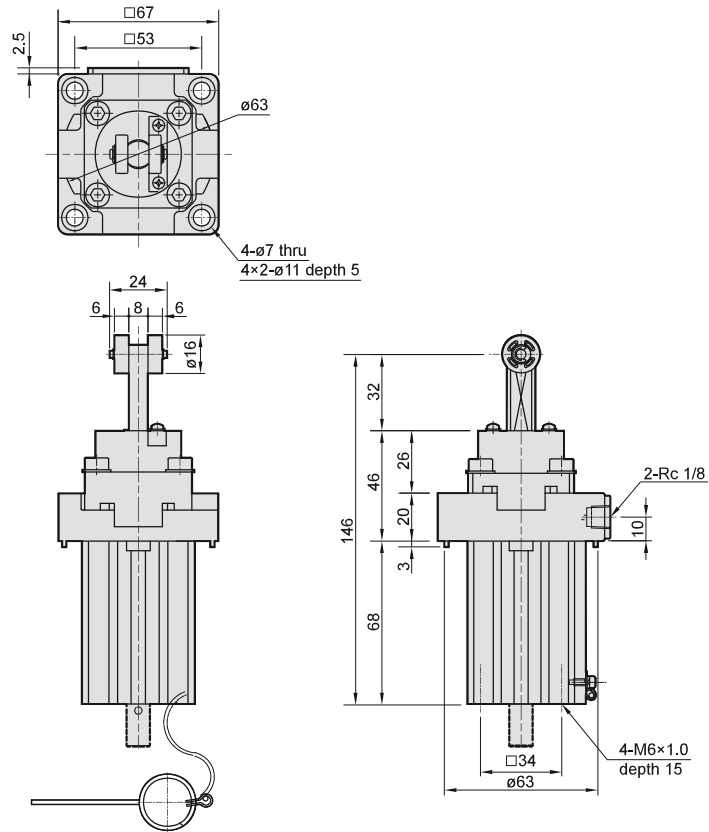


■ PSBR Ø40-30

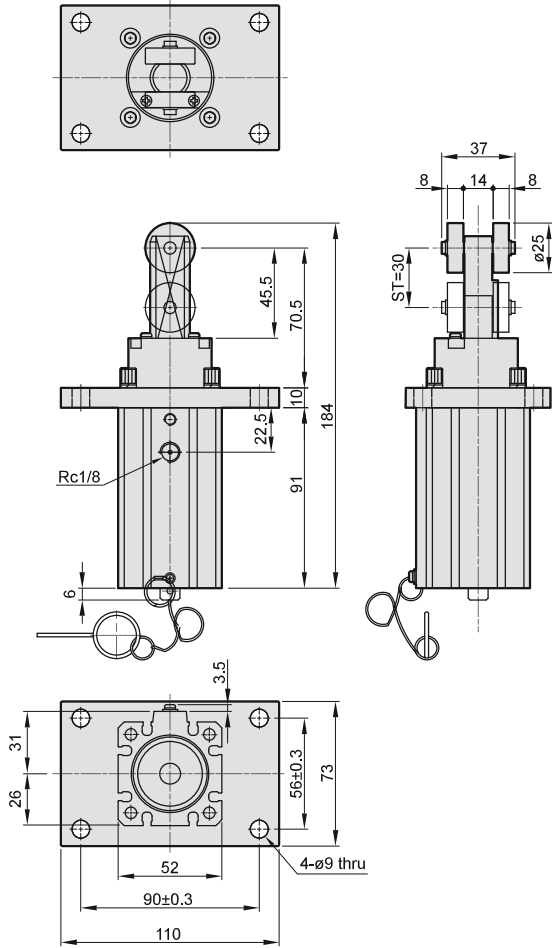


■ PSBR Ø50-30

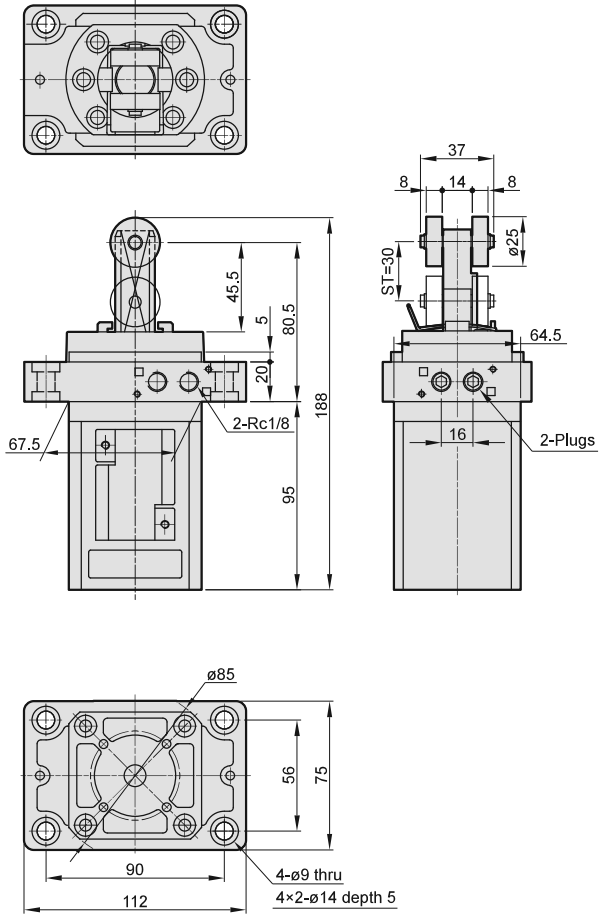

■ PSBS $\varnothing 20-10$

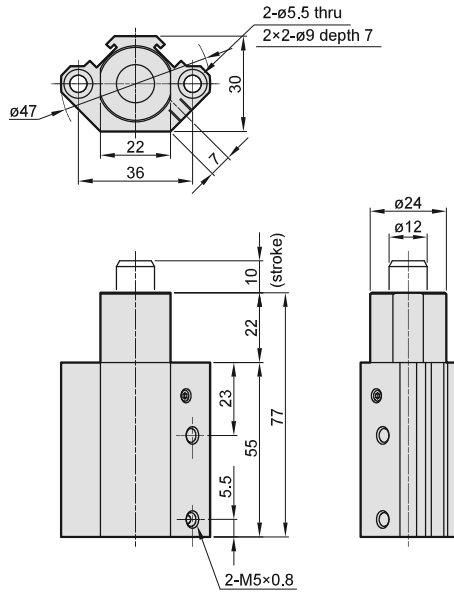

■ PSBS $\varnothing 32-20$

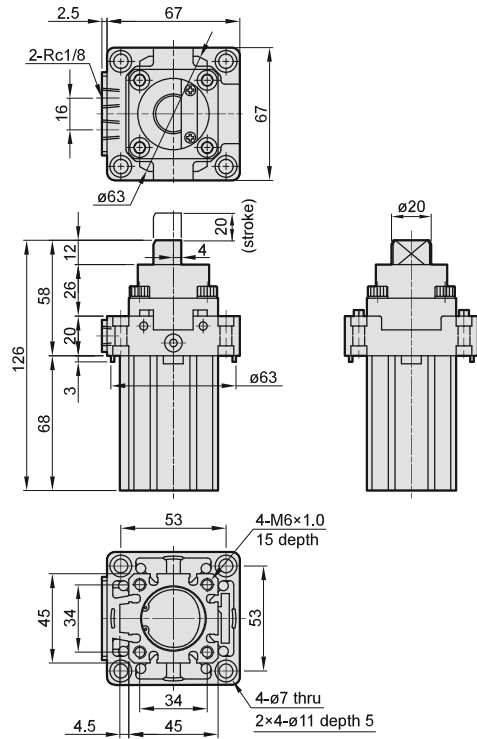

■ PSBS $\varnothing 50-30$

