


RIV502 Hydropneumatic riveting tool for standard blind rivets

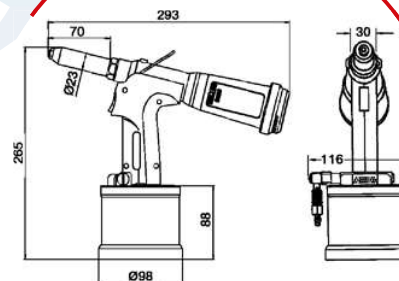

Code 4102900

To place standard blind rivets, up to Ø 4.0, in all materials (for aluminium only Ø 4.8).

RIV502 is a hydropneumatic tool with retention of the blind rivet and capture of the separated mandrel. Plastic handle and aluminium body make the tool light and handy, and consequently easy to use for operators. RIV502 combines functionality with a highly competitive price, which makes it very attractive for those who use this kind of tool continuously and professionally.

Fittings

Description	Pc	Code
Nosepiece Ø 2.4 mm	1	4199000
Nosepiece Ø 3.0-3.2 mm	1	4199100
Nosepiece Ø 4.0 mm (on head)	1	4199200
Nosepiece Ø 4.8 mm	1	4169100
Jaws (3 pcs)	2	1250100
Jaw opener Ø 2.4-3.2 mm	1	4136700
Jaw opener Ø 4.0-4.8 mm (on head)	1	4136600
Jaw return spring	1	4136800
Jaws carrier cone	1	4136500
Oil syringe	1	-
Oil	1	-
Hexagonal allen wrench 3 mm	1	-
10-12 mm wrench	1	-
15-16 mm wrench	1	-
16-17 mm wrench	1	-

The tool is supplied with kit Ø 4.0 already assembled.

Technical data and features

Air working pressure	5 bar
Min-max air pressure	3/7 bar
Air consumption per cycle (6 bar)	2.6 lt
Stroke	20 mm
Max power (6 bar)	8500 N
Weight	1.429 Kg
Vibrations	< 2,5 m/s²
Noise level	77.5 dB (A)



Knob for suction adjusting.

