
INOVANCE

Easy Series PLC

High performance, compact, EtherCAT-enabled PLC



- Compact footprint
- A complete product range from the simplest to the most complex motion control capable PLC
- PLCopen compliant axis control
- Simulation mode for offline debugging
- Real-time fieldbus

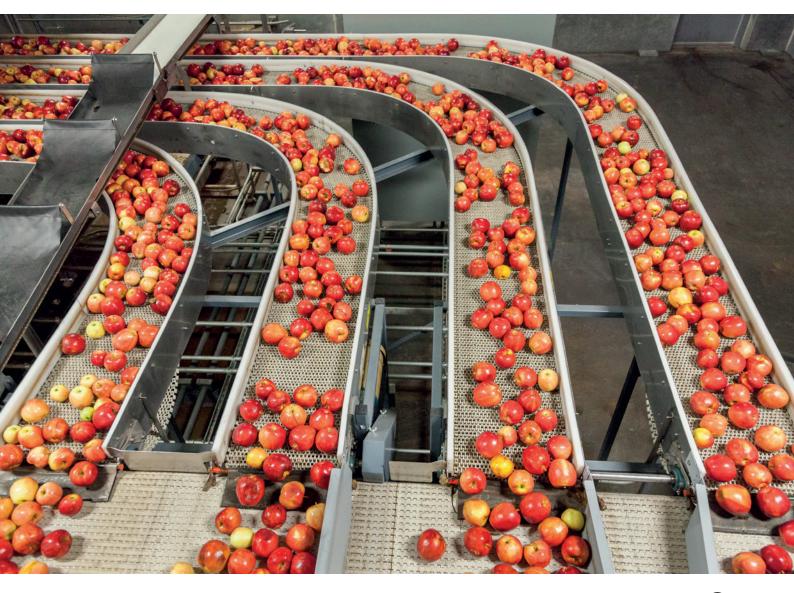










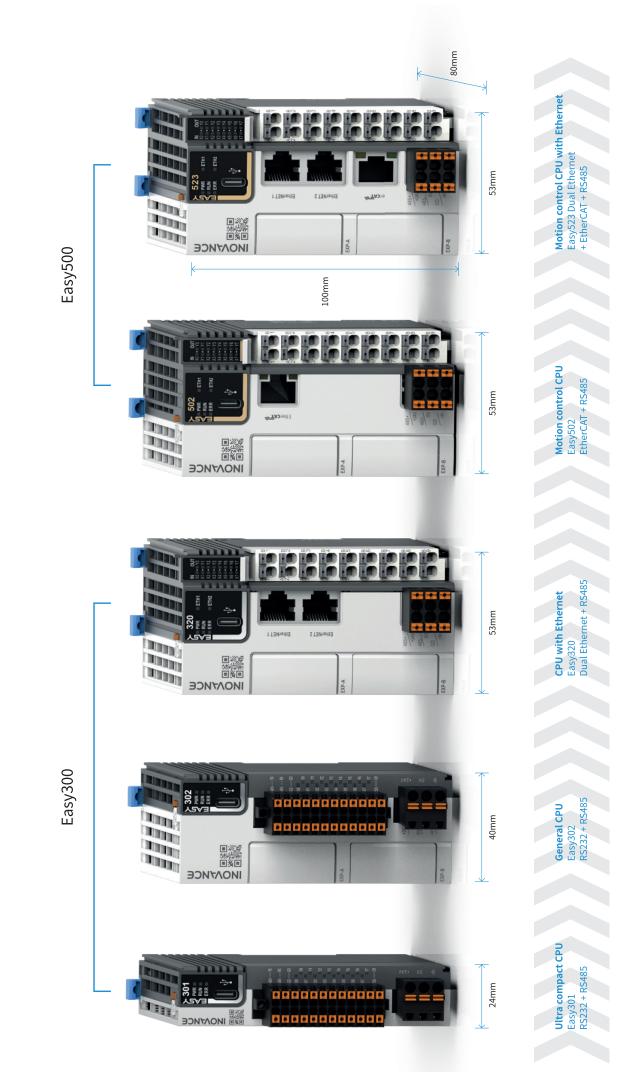

Easy series PLC: a comprehensive product range

m

2





EASY programming Customized FB/FC self defined variable programming assistant



EASY assembly & wiring

Easy to add and/or replace modules. Plug in wires directly with spring clamp terminals



EASY commissioning

Auto device scanning, easy configuration, servo debug without programming, offline simulation



The type-C port works as a programming port allowing support programs, uploading/downloading and debugging.




Easy wiring with spring clamp terminals.



Slim and compact I/O expansion modules (GL20). Easy to plug in and remove for fast replacement.


Scalable system architecture

Multiple configurations

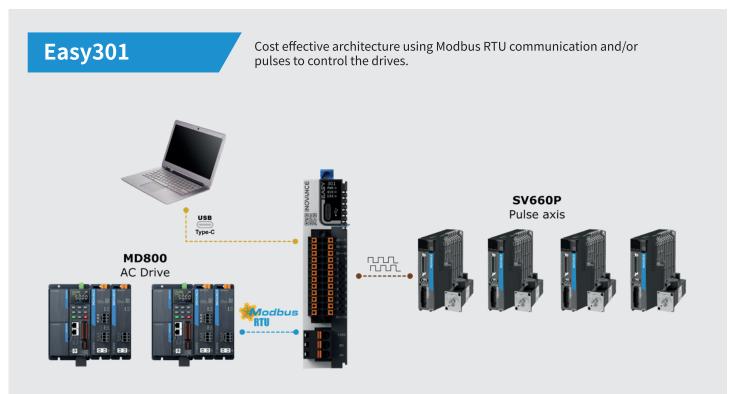


Easy302

Flexible architecture using CANopen communication and/or pulses to control the drives.

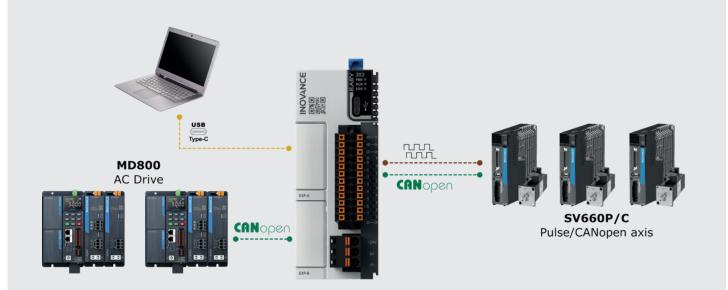


The Easy PLC series can cover anything from the simplest pulse control architecture to the most complex motion control applications using EtherCAT and Ethernet/IP

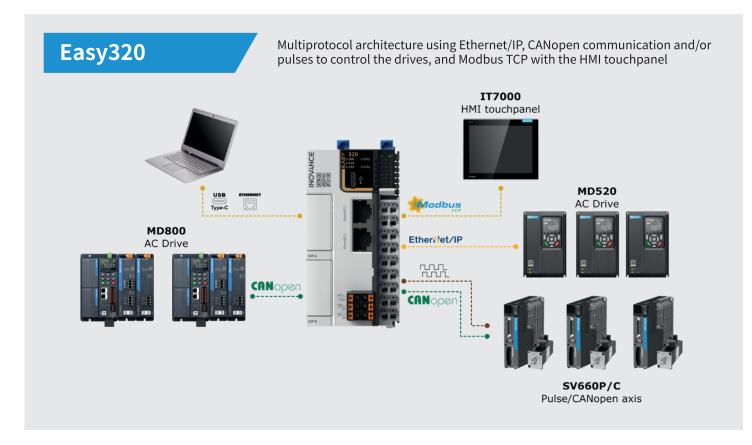

Easy523

Powerful motion control architecture using realtime EtherCAT communication and Ethernet/IP to control the drives, and Modbus TCP with the HMI touchpanel

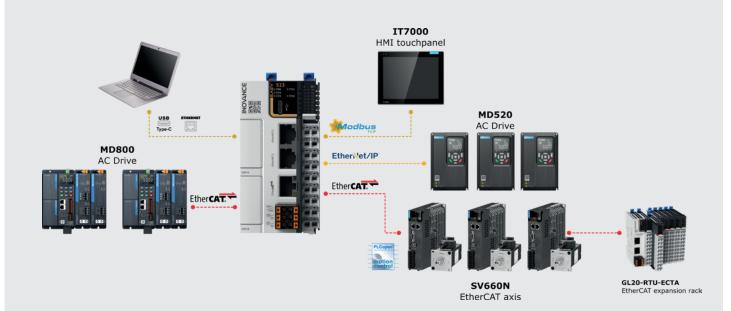

| S |
|-------------------------|
| |
| 0 |
| • |
| + |
| D |
| U |
| |
| |
| U |
| D |
| Õ |
| $\overline{\mathbf{n}}$ |
| |

Basic specifications of easy series controller


| | Easy300 | | | Easy500 | |
|--|---|--|--|--|--|
| | Easy301-0808TN | Easy302-0808TN | Easy320-0808TN | Easy502-0808TN | Easy523-0808TN |
| Part number | 01440323 | 01440324 | 01440325 | 01440336 | 01440326 |
| Motion axis | 4 pulse control axes | 5 pulse control axes | 5 pulse control axes | A total of 16 synchronised axes are possible. This can be a max. of 16 EtherCAT axes ¹ , or a combination that includes a max. of five pulse control axes | A total of 32 synchronised axes are possible. This can be a max. of 32 EtherCAT axes ¹ , or a combination that includes a max. of five pulse control axes |
| Expansion modules (GL20) | ω | 16 | | | |
| Expansion slots (GE20) | I | 2 (support communication/dig | 2 (support communication/digital IO/analog IO/TF card/RTC) | | |
| | | | 2 | | 2 |
| Ethernet | I | | Modbus TCP up to 32 slaves | 1 | Modbus TCP up to 32 slaves |
| | | | Ethernet/IP scanner/adapter | | Ethernet/IP scanner/adapter |
| EtherCAT | I | | | Support up to 72 EtherCAT slaves ² (including synchronised axes) | lised axes) |
| Serial communication | 1 x RS232 1 x RS485 Support free protocol, Modbus RTU/ASC up to 16 slaves | 1 x RS232, 1 x RS485 Support 1 x RS232/485 expansion and 1 x CAN expansion Support free protocol, Modbus RTU/ASC 16 slaves (recommended) | 1 x R5485 Support 2 x R5232 /485 expansion and 1 x CAN expansion Support free protocol, Modbus RTU/ASC 16 slaves (recommended) | 1 x RS485 Support 2 x RS232/485 expansion and 1 x CAN expansion Support free protocol, Modbus RTU/ASC 16 slaves (recommended) | 1 x RS485 Support 2 x RS232/485 expansion Support free protocol, Modbus RTU/ASC 16 slaves (recommended) |
| CAN communication | 1 | 1 (requires expansion card), su | 1 (requires expansion card), supports CANlink/CANopen master/slave (up to 62 slaves) | /slave (up to 62 slaves) | |
| Program storage | 128 K step | | | 200 k step | |
| Data storado | 1 Mbyte (128 KB non-volatile) | tile) | | 2 Mbyte (128 KB non-volatile) | |
| Data storage | 150 KB soft element, non-volatile after No.1000 | -volatile after No.1000 | | | |
| Instruction execution time | 20 K step / 2 ms | | | | 20 K step / 1.6 ms |
| Dimensions (WxHxD: mm) | 24x100x83 | 40x100x83 | 53x100x80 | | |
| Other interfaces | Type C | Type C, TF card (requires TF card expansion module) | ırd expansion module) | | |
| CAM and interpolation | I | Supports CAM and interpolation motion | on motion | | |
| Encoder axis | 4 channel encoder axis (8 | 4 channel encoder axis (8 x high speed inputs, up to 200 KHz) | Hz) | | |
| Built in I/Os | 8 inputs (selectable sink/ | 8 inputs (selectable sink/source) and 8 outputs (sink type - available, source type - coming soon) | available, source type - coming s | oon) | |
| Programming languages | LD, SFC, ST, FB/FC (suppo | LD, SFC, ST, FB/FC (supports encryption functionality) | | | |
| Power supply | DC24V | | | | |
| 1 Synchronised axes 2 EtherCAT slaves include I/Os and synchronised axes 2 EtherCAT slaves include I/Os and synchronised axes | hronised and non-synchronised ax | SS | | | |

∞

б

Autoshop


A powerful PC tool is provided as standard

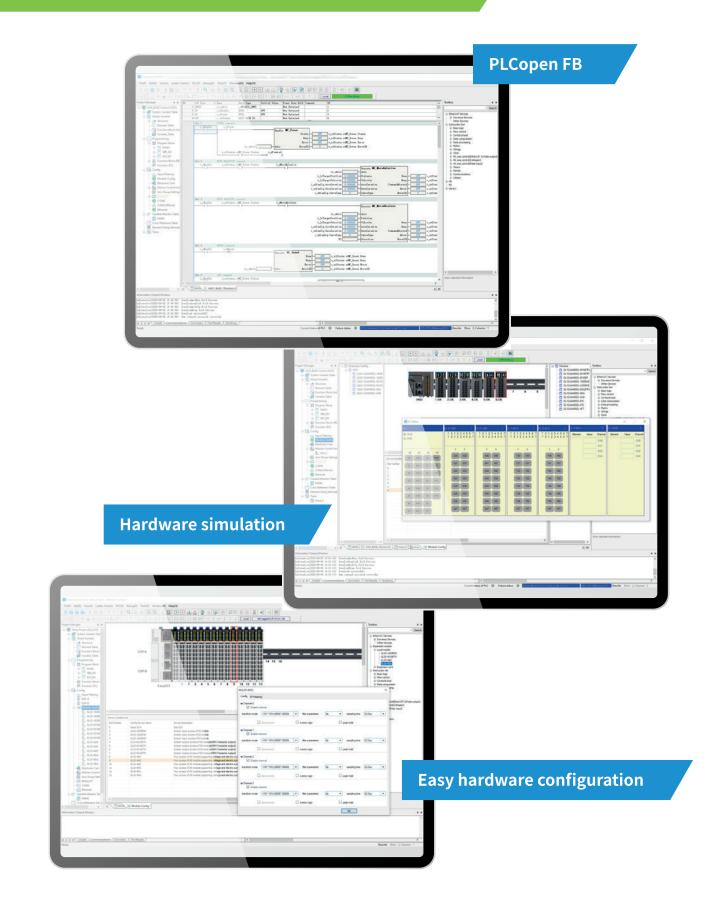



Expansion capability

GE20 Expansion cards

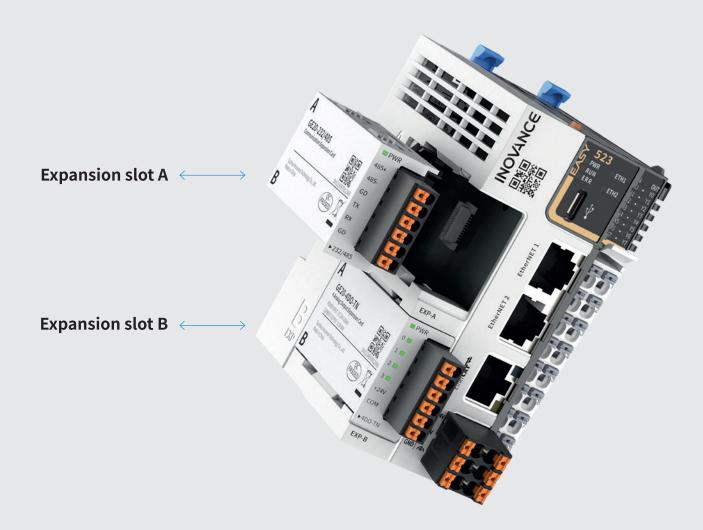

Communications capabilities

- RS485 connection up to 31 slaves
- CANopen up to 62 slaves
- CANlink up to 62 slaves
- Modbus TCP up to 32 slaves (working as client/master)
- Modbus TCP up to 16 masters (working as server/slave)
- Up to 3 serial ports (RS232/485) 1 onboard and 2 GE20 expansion cards

Please note: GE20 expansion cards are not applicable to Easy301 CPU.

| Product appearance | Expansion card | Product code | Description | Slot A | Slot B |
|--|------------------|--------------|--|--------------|--------------|
| | GE20-4DO-TN | 01480033 | 4 channel sink outputs | \checkmark | \checkmark |
| | GE20-4DI | 01480032 | 4 channel source/sink inputs | \checkmark | \checkmark |
| 909 909 902 902 902 902 902 902 902 902 | GE20-2AD1DA-I | 01480027 | 2 analog inputs and 1 analog current output | \checkmark | \checkmark |
| 000 0000000000000000000000000000000000 | GE20-2AD1DA-V | 01480028 | 2 analog inputs and 1 analog voltage output | \checkmark | \checkmark |
| 405 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 | GE20-232/485-RTC | 01480035 | RS232/485 expansion card with RTC | | \checkmark |
| 45- 45- 00 1x 1x 00 00 00 00 00 00 00 00 00 00 00 00 00 | GE20-232/485 | 01480029 | RS232/485 expansion card | \checkmark | \checkmark |
| RIN EAR FEAR 485 | GE20-CAN-485 | 01480034 | CAN/RS485 expansion card with RJ45 interface | \checkmark | |
| • FTC | GE20-RTC | 01480031 | RTC expansion card | | \checkmark |
| ■ 748 • 1 | GE20-TF | 01480030 | TF expansion card | | \checkmark |
| | | | | | |

GE20 Expansion cards

Digital expansion card

| Material code | 01480033 | Material code | 01480032 |
|---------------------------|---|-------------------------|--|
| Appearance | A States of the second | Appearance | A Grand and and and and and and and and and |
| Model | GE20-4DO-TN | Model | GE20-4DI |
| Description | 4 channel output module | Description | 4 channel input module |
| Slot | A/B | Slot | A/B |
| IP level | IP20 | IP level | IP20 |
| Operational temperature | -20 °C ~ 55 °C | Operational temperature | -20 °C ~ 55 °C |
| Output type | Digital transistor | Input type | Digital transistor |
| Source/sink (PNP/NPN) | Sink (NPN) | Source/sink (PNP/NPN) | Source/sink |
| Channels | 4 | Channels | 4 |
| Output voltage | 24 V DC (20.4 V DC ~ 26.4 V DC) | Input voltage | 24 V DC \pm 10% (21.6 V DC \sim 26.4 V DC) |
| Output (resistance load) | 0.5 A/point, 1 A/common point | Input resistance | 5.6 kΩ |
| Output (inductance load) | 6 w/24 V DC (in total) | ON current | >3.5 mA |
| Output (lamp load) | 1 w/24 V DC (in total) | OFF current | <1.5 mA |
| Hardware ON/OFF response | Within 100 us | Input response | pprox15 ms (hardware RC filter) |
| Leakage current (ON->OFF) | 10 uA below | ON voltage | ≥15 V DC |
| Frequency | Resistance load: 100 Hz, inductance load: 0.5 Hz, lamp load: 10 Hz | OFF voltage | ≤5 V DC |
| Isolation | Opto-isolation | Software filter | NOT support |
| Protection function | Surge suppression | Isolation | Opto-isolation |

Analog expansion card

| Material code | 01480028 | | |
|--------------------------------------|--|---------------------------------------|------------------------|
| Appearance | A CERTIFICATION OF THE RECEIPTION OF THE RECEIPT | | |
| Model | GE20-2AD1DA-V | | |
| Description | 2 channel analog inputs plus 1 channel analog input, voltage type | | |
| Slot | A/B | | |
| IP level | IP20 | | |
| Operational temperature | -20 °C~55 °C | | |
| Input type | Analog input | Output type | Analog output |
| Input mode | Current/voltage | Output mode | Voltage |
| Input channels | 2 | Output channel | 1 |
| Resolution | 12 bit | Resolution | 12 bit |
| Conversion time | 6 ms/channel | Conversion time | 1 ms/channel |
| Input range | 0 ~ 10 v/0 mA ~ 20 mA | Output range | 0 ~ 10 v |
| Current input resistance | 250 Ω | Voltage output resistance | >2 ΚΩ |
| Input accuracy (25 °C) | Voltage $\pm 1\%$, Current $\pm 1\%$ (full range) | Output accuracy (25 °C) | $\pm 1\%$ (full range) |
| Input accuracy (-20 °C \sim 55 °C) | Voltage ±3%, Current±3% (full range) | Output accuracy (-20 °C \sim 55 °C) | ±5% (full range) |
| Digital input range | 0~20,000 | Digital output range | 0~20,000 |

Material code

Appearance

01480027



| | 2.200 | | | |
|--------------------------------------|--|---|-------------------------------------|--|
| Model | GE20-2AD1DA-I | | | |
| Description | 2 channel analog inputs plus 1 channel ana | 2 channel analog inputs plus 1 channel analog input, current type | | |
| Slot | A/B | | | |
| IP level | IP20 | | | |
| Operational temperature | -20 °C ~ 55 °C | | | |
| Input type | Analog input | Output type | Analog output | |
| Input mode | Current/ voltage | Output mode | Current | |
| Input channels | 2 | Output channel | 1 | |
| Resolution | 12 bit | Resolution | 12 bit | |
| Conversion time | 6ms/ channel | Conversion time | 1 ms/channel | |
| Input range | 0 ~ 10 v/ 0 mA \sim 20 mA | Output range | $0 \mathrm{mA} \sim 20 \mathrm{mA}$ | |
| Current input resistance | 250 Ω | Current output resistance | $0~\Omega\sim 500~\Omega$ | |
| Input accuracy (25 °C) | Voltage $\pm 1\%$, Current $\pm 1\%$ (full range) | Output accuracy (25 °C) | $\pm 1\%$ (full range) | |
| Input accuracy (-20 °C \sim 55 °C) | Voltage \pm 3%, Current \pm 3% (full range) | Output accuracy (-20 °C \sim 55 °C) | ±5% (full range) | |
| Digital input range | 0~20,000 | Digital output range | 0~20,000 | |

GE20 Expansion cards

Communication expansion card

| Material code | 01480035 | 01480029 | 01480034 |
|--------------------------|---|---|--|
| Appearance | B B B B B B B B B B B B B B B B B B B | A SEA 121455 B SEA 1214555 B SEA 1214555 B SEA 1214555 B SEA 12145555 B SEA 121455555 B SEA 121455555555555555555555555555555555555 | A SCAR CAR 455 State of the state of the s |
| Model | GE20-232/485-RTC | GE20-232/485 | GE20-CAN-485 |
| Description | RS232/RS485 communications card with RTC | RS232/ RS485 communications card | CAN/RS485 communications card |
| Slot | В | A/B | A |
| IP level | IP20 | IP20 | IP20 |
| Operational temperature | -20 °C ~ 55 °C | -20 °C ~ 55 °C | -20 °C ~ 55 °C |
| RS485/RS232 | 1 | 1 | 1 |
| Terminal resistor | Set via DIP switch | Set via DIP switch | NO terminal resistor for RS485 Built-in terminal resistor for CAN |
| Communications ability | Up to 31 slaves Distance between adjacent slaves not over 3m | Up to 31 slaves Distance between adjacent slaves not over 3 m | Up to 31 slaves(RS485) Distance between adjacent slaves not over 3 m Up to 63 slaves (CAN) |
| Baud rate of RS485/RS232 | 9600/19200/38400/ 57600/115200 bit/s | 9600/19200/38400/ 57600/115200 bit/s | 9600/19200/38400/ 57600/115200 bit/s |
| Baud rate of CAN | / | / | 1 Mbit/s: distance < 20 m 500 kbit/s: distance < 80 m 250 kbit/s: distance < 150 m 125 kbit/s: distance < 300 m 100 kbit/s: distance < 500 m 50 kbit/s: distance < 1,000 m |
| RTC accuracy | 120 sec/ month | / | / |
| RTC format | YYYY/MM/DD/HH/MM/SS | / | / |
| In-built lithium battery | CR2302, 3 year life cycle, removable | / | / |

RTC expansion card


| Material code | 01480031 |
|--------------------------|--|
| Appearance | General and a second se |
| Model | GE20-RTC |
| Description | RTC extension card |
| Slot | В |
| IP level | IP20 |
| Operational temperature | -20 °C ~ 55 °C |
| RTC accuracy | 120 sec/month |
| RTC format | YYYY/MM/DD/HH/MM/SS |
| In-built lithium battery | CR2302, 3 year life cycle, removable |

TF card expansion card

| Material code | 01480030 |
|-------------------------|--|
| Appearance | GEAD TH B B B B CEAD TH CEAD T |
| Model | GE20-TF |
| Description | TF card extension card |
| Slot | В |
| IP level | IP20 |
| Operational temperature | -20 °C ~ 55 °C |
| SD card capacity | NOT over 32 G |
| SD card type | TransFlash (Micro SD) |

Expansion capability

GL20 expansion modules

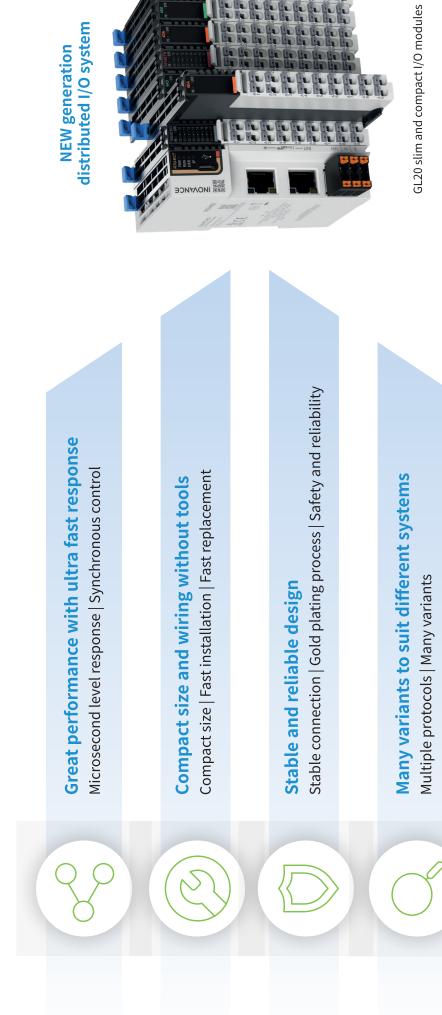

Applicable to either bus coupler or CPU




Expansion capability

GL20 expansion modules




Compact Size


Saves 2/3 of the space in the cabinet compared to the previous generation product - GL10

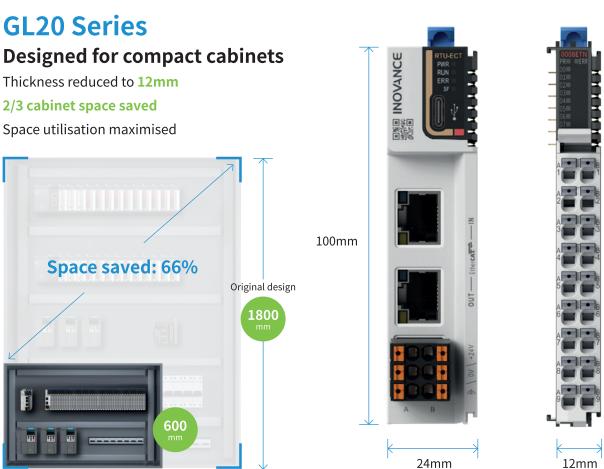

24mm

Compact design and tool-free wiring

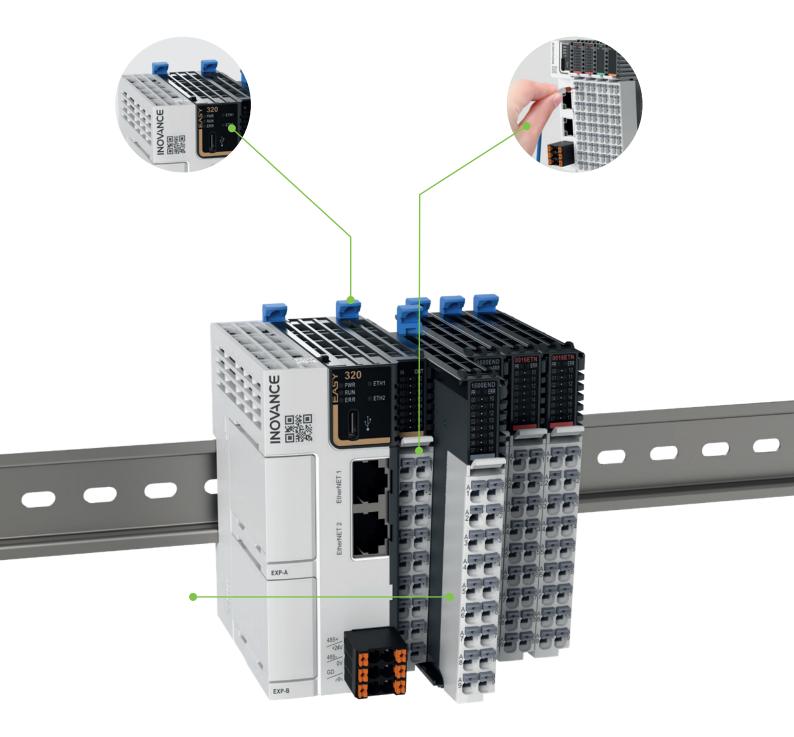

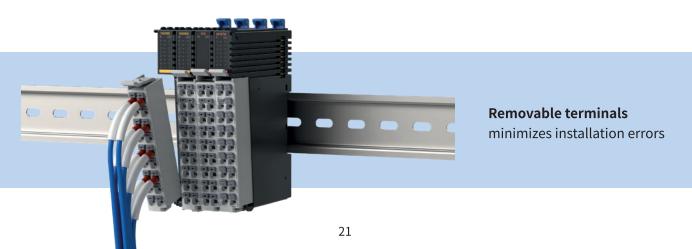

GL20 modules – EtherCAT bus coupler






- Min. cycle time of 125 microseconds
- Allows EtherCAT alias configuration
- USB-C port for firmware upgrade


| Specification | Description |
|--|--|
| Dimensions (WxHxD:mm) | 24×100×83 |
| Max. number of expansion modules | 16 |
| Protection | Over current/ reverse connection protection |
| Operating ambient temperature | -20~55°C |
| Operating ambient humidity | Less than 95% and no condensation |
| IP rating | IP20 |
| Power supply | +24 VDC |
| Process data | Up to 1,024 input bytes and 1,024 output bytes |
| Mailbox size | Up to 256 input bytes and 256 output bytes |
| Alias It admits the configuration of EtherCAT aliases through the master. Expansion r connected behind ECT do not support alias access and configuration. Range: 1- | |
| EtherCAT cycle | Min. cycle time of 125 microseconds |
| EtherCAT port | 2 x RJ45 |
| Communication rate | 100 M, full duplex |
| Transmission distance | 100 meters |
| Firmware update port | USB-C port for firmware upgrade |

Expansion capability

GL20 expansion modules

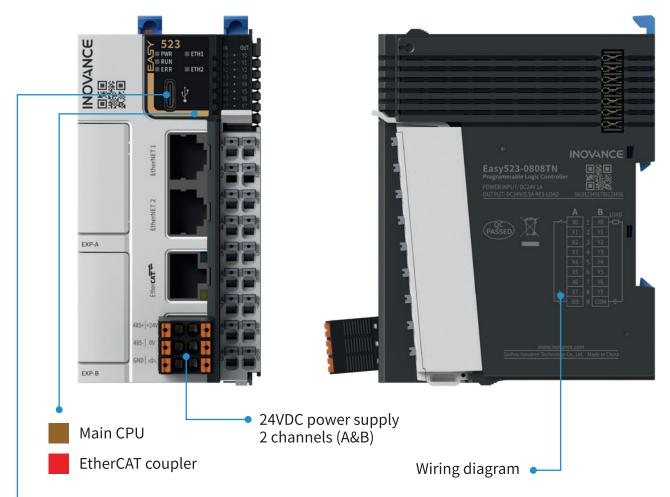

Type C port for firmware upgrade

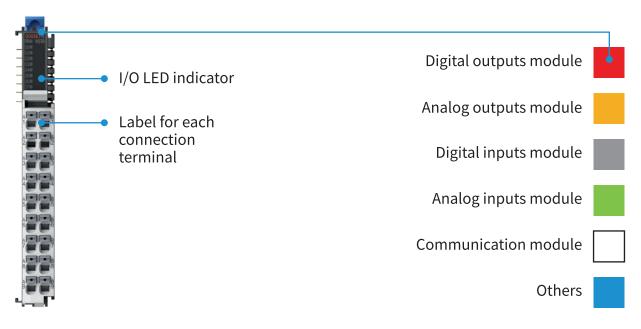


Please note: the colour codes specify the module type


| 77 77 77 77 77 77 77 77 77 77 77 77 77 77 | | 77 77 77 77 77 77 |
|--|--|-------------------------|


| Type of module | Model | Product code | Description |
|-----------------|---------------------|--------------|--|
| Bus coupler | GL20-RTU-ECT | 1440286 | EtherCAT slave bus coupler. Up to 16 expansion modules can be added |
| Bus coupler | GL20-RTU-PN | 1440289 | PROFINET slave bus coupler. Up to 16 expansion modules can be added |
| | GL20-1600END | 1440291 | 16 x source (PNP)/sink (NPN) digital inputs module. Input filter from 0.25 ms to 32 ms |
| Digital inputs | GL20-0800END | 1440381 | 8 x source (PNP)/sink (NPN) digital inputs module. Input filter from 0.25 ms to 32 ms |
| | GL20-3200END-M | 1440378 | 32 x source (PNP)/sink (NPN) digital inputs module. Input filter from 0.25 ms to 32 ms |
| | GL20-0008ETP | 1440380 | $8x$ source (PNP) transistor outputs module. Response time 100 μs |
| | GL20-0008ETN | 1440379 | $8x\text{sink}$ (NPN) transistor outputs module. Response time 100 μs |
| Digital outputs | GL20-0016ETP | 1440292 | 16 x source (PNP) transistor outputs module. Response time 100 $\ensuremath{\mu s}$ |
| | GL20-0016ETN | 1440293 | 16 x sink (NPN) transistor outputs module. Response time 100 μs |
| | GL20-0032ETN-M | 1440377 | 32 x sink (NPN) transistor outputs module. Response time 100 μs |
| Relay outputs | GL20-0008ER | 1440334 | 8 x relay outputs module. Response time 15 ms |
| Digital I/Os | GL20-0808ETN | 1440339 | $8x$ source (PNP)/sink (NPN) digital inputs and $8x$ sink (NPN) transistor outputs module. Response time 100 $\mu s.$ Input filter from 0.25 ms to 32 ms |
| Digital I/Os | GL20-3232ETN-M | 1440290 | 32 x source (PNP)/sink (NPN) digital inputs and 32 x sink (NPN) transistor outputs module. Response time 100 $\mu s.$ Input filter from 0.25 ms to 32 ms |
| Analog inputs | GL20-4AD | 1440288 | $4x$ analog inputs module (resolution 16 bits, sampling time 250 $\mu s)$ |
| Analog outputs | GL20-4DA | 1440287 | $4x$ analog outputs module (resolution 16 bits, sampling time 250 $\mu s)$ |
| Temperature | GL20-4PT | 1440337 | 4 x channel thermal resistance inputs temperature detection module (Pt100, Pt500, Pt1000, Cu100, KTY84, NTC5K, NTC10K) |
| detection | GL20-4TC | 1440338 | 4x channel thermocouple inputs temperature detection module (thermocouple type: B,E,N,J,K,R,S,T) |
| | XA3210A-40-L0.5M-01 | 15310167 | I/O extension cable - 0.5 m length with 2 FCN connectors (required for GL20-3200END/GL20-0032ETN-M/GL20-3232ETN) |
| Accessories | XA3210A-40-L2M-01 | 15310166 | I/O extension cable - 2 m length with 2 FCN connectors (required for GL20-3200END/ GL20-0032ETN-M/GL20-3232ETN) |
| | Т024-К | 15020452 | 40PIN MIL screw terminal block (Required for GL20-3200END/GL20-0032ETN-M/GL20-3232ETN) |

Dimensions


Easy301

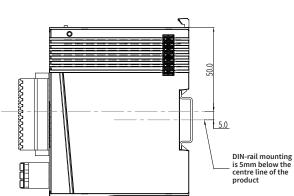





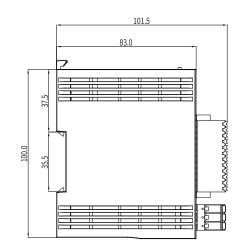


Easy302










GL20-RTU-ECT

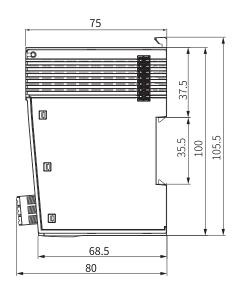





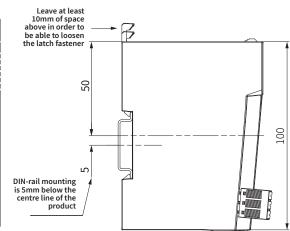


Easy320










Easy502 & 523





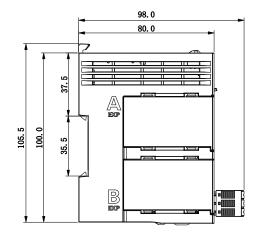

GL20-1600END, GL20-0800END, GL20-0008ETP, GL20-0016ETP, GL20-0016ETN, GL20-0808ETN, GL20-4AD, GL20-4DA, GL20-4PT, GL20-4TC

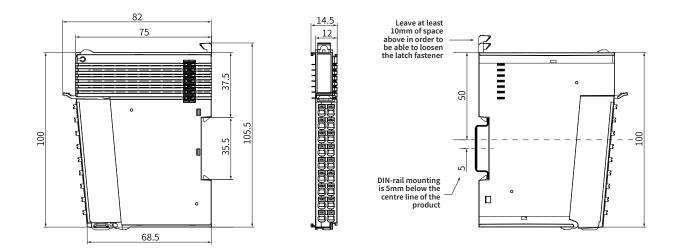

Please note: GL20-008ER, GL20-3200END, GL20-0032ETN-M, GL20-3232ETN are a larger size. Details are available in the separate GL20 brochure.

Driven by technology

| <section-header></section-header> | | HV drives |
|-----------------------------------|-----------------------------------|-----------------------------------|
| <section-header></section-header> | <section-header></section-header> | <section-header></section-header> |
| PLCs & HMIs | CNC machine tool solutions | Electric vehicle inverters |

8.



- **\$** : 0-2675-8239
- : @nandeeintertrade
- f : nandeeintertrade
- : www.nandee.co.th
- : marketing@nandee.co.th sales@nandee.co.th