




Semi-Automatic Strapping Machine

Introducing the new iQ-400, StraPack's new semi-automatic strapping machine with dual tension mode. This allows for a wide variety of applications with just a flick of a switch.

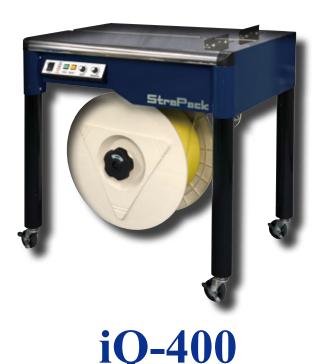

- The iQ-400 is a durable and heavy-duty strapping machine designed to withstand various environments.
- The iQ-400 is yet amazingly quiet to operate and well suited for office use also.
- The iQ-400 has less moving parts, which makes it easy to maintain and keeps the operation cost low.
- All electric parts are arranged in one side of the machine, enclosed in the cabinet, for easy maintenance and protection of crucial parts.
- The iQ-400 runs strap from 5 millimeters to 15.5 millimeters (5/8 inches) without additional parts.
- The torque tension mode is suitable for stronger tension or to strap compressible packages, while the stroke tension mode is best for soft tension or quick operation.
- Tool-free access to frequently accessed areas for easy maintenance.
- Machine is available in 4 different working heights. 750mm is the standard height. To set the machine to a working height of 800mm, 850mm, or 900mm optionally, the appropriate set of legs must be specified at point of order.

Standard Specifications

| Dimension | Width | 780 mm | 30-3/4 in. |
|-------------------------|--------|--|--|
| | Height | 775 mm(with work guide) | 30-1/2 in.(with work guide) |
| | Depth | 540 mm | 21-1/4 in. |
| | Weight | 45 kg. | 99 lbs. |
| Table Height | | 750 mm | 29-1/2 in. |
| Min. Package Size | | W 80 X H 30 mm | W 3-1/8 X H 1-1/8 in. |
| Joint / Strap/ Coil | | heat seal / polypropylene | heat seal / polypropylene |
| | | ID 200 X W 200 mm | 8 X 8 in. |
| Strap Width / Thickness | | 5, 6,9,12 (15.5) mm /0.45-0.7mm | 1/4,3/8,1/2 (5/8) in./ 0.017-0.027 in. |
| Strap Tension | | Max. 450N (45.9 kgf) or 150mm stroke | Max. 101 lbsf. or 5-7/8 in. stroke |
| Power Supply | | 110, 120, 220, 230, 240V Single Phase 50/60Hz 0.35kW | |

Dimensions and specifications are subject to change without notice. Modification rights reserved.

© 2020 Strapack Corporation

DISTRIBUTED BY:



Tel: 0-2675-8230 (Auto), 0-2675-8240 (Auto)

Fax: 0-2212-1448, 0-2213-0360

f : nandeeintertrade

: @nandeeintertrade

x: sales@nandee.co.th

: www.nandee.co.th

