

Transformerless (AC)

Brush motor

Brushless motor

Miniature screw

Precision screw

Machine screw


2.6 - 6.0 mm



DLV7104/8104/8204 Series Non-CE



- Features**
- The most popular models have been redesigned
- Equipped with bit grounding mechanism
 - Long-life cam is utilized
 - The clear plastic torque adjustment ring cover minimizes unintentional tampering of the preset torque
 - The changeover switch enables operators to change forward/reverse rotation with a single hand
 - The ergonomically designed grip can be held tightly to resist against tightening reaction force, resulting in reduced operator fatigue


Specifications			Standard						High Torque	High Speed		
Electric Screwdriver	Model	Plug Shape: USA	DLV7124-MKE	DLV7134-MKE	DLV7144-MKE	DLV8124-MKE	DLV8134-MKE	DLV8144-MKE	DLV8154-MKE	DLV8224-MKE	DLV8234-MKE	DLV8244-MKE
		Plug Shape: UK	DLV7124-MKH	DLV7134-MKH	DLV7144-MKH	DLV8124-MKH	DLV8134-MKH	DLV8144-MKH	DLV8154-MKH	DLV8224-MKH	DLV8234-MKH	DLV8244-MKH
	Starting Method		Lever Start				Push to Start					
	Input Voltage		230 V AC, 50/60 Hz									
	Torque Adjustment		Stepless									
	Torque	(Nm) [lbf-in]	0.25 - 0.75 [2.2 - 6.6]	0.5 - 1.7 [4.4 - 15.1]	1.2 - 3.0 [10.6 - 26.6]	0.25 - 0.75 [2.2 - 6.6]	0.5 - 1.7 [4.4 - 15.1]	1.2 - 3.0 [10.6 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	0.35 - 0.7 [3.1 - 6.2]	0.5 - 1.7 [4.4 - 15.1]	1.2 - 3.0 [10.6 - 26.6]
	Free Speed	(min ⁻¹)	900		600	900		600	400	2000	1800	1100
	Power Consumption	(W)	35						45			
	Screw Size	Machine Screw	2.6 - 3.0	2.6 - 4.0	3.5 - 5.0	2.6 - 3.0	2.6 - 4.0	3.5 - 5.0	4.5 - 6.0	2.6 - 3.0	2.6 - 4.0	3.5 - 5.0
		Tapping Screw	2.3 - 3.0	2.3 - 3.5	3.0 - 4.0	2.3 - 3.0	2.3 - 3.5	3.0 - 4.0	4.5 - 5.0	2.3 - 3.0	2.3 - 3.5	3.0 - 4.0
	Mass	(g [lbs])	720 [1.59]				710 [1.57]		910 [2.01]	710 [1.57]		
	Bit Type			For MKE				For MKH				
USA							UK					

Please contact us for 5 mm bit type.

Standard Accessories

Model		MKE/MKH	8154-MKE/MKH
Bit NK35	No.1 × 7 × 75	1	-
	No.2 × 7 × 75	1	1
	No.3 × 7 × 50	-	1
Spare Carbon Brush		2	
Suspension Bail		1	

Torque Diagrams (for reference)

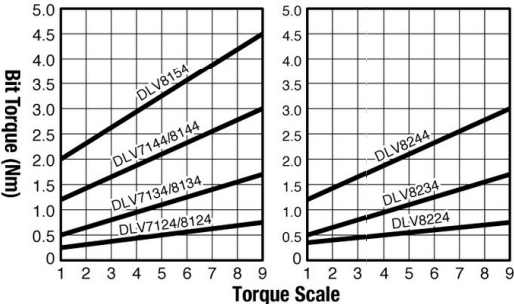

External Dimensions

•DLV7124 / 7134 / 7144

•DLV8154

•DLV8124 / 8134 / 8144 / 8224 / 8234 / 8244

unit: mm [inch]